


20 Mini Edgeless Cove



Ordering Information									
Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	Lens	Finish	Options
WG-20MEC	RPT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M	927 930 935 940	X SW D010 DALI LE	SD (std) CDC	W (std) B G F	LEC REC LREC



Luminaire

- Continuous, evenly illuminated snap-in lens without visible LED pattern.
- Continuous mounting to any desired length within 0.25" (6.35mm).
- Satin Diffuser (standard) for maximum efficiency and spot free lens.
- Lengths and angles factory cut to exact field dimensions.
- Standard and custom corners.
- Field replaceable LED boards.

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (6.35mm), i.e. 72.25" (1835mm)
For patterns specify each length, i.e. 2 sided:
A x B = 72.25" (1835mm) x 48" (1220mm);
3 sided:
A x B x C; 4 sided: A x B x A x B)

LED³

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)

Color / Lumens⁴

- 90+ CRI minimum (Low/Mid)
- 927 = 2700K, (735/1355 lm/m)
 - 930 = 3000K, (758/1398 lm/m)
 - 935 = 3500K, (771/1427 lm/m)
 - 940 = 4000K, (781/1440 lm/m)

Driver (integral)⁵

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10V/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

Lens

- SD = Satin Clear diffuser (standard)
- CDC = Clear Dust Cover

Finish


- W = White powder coated, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps

Emergency

- Emergency LED driver available, order separately.

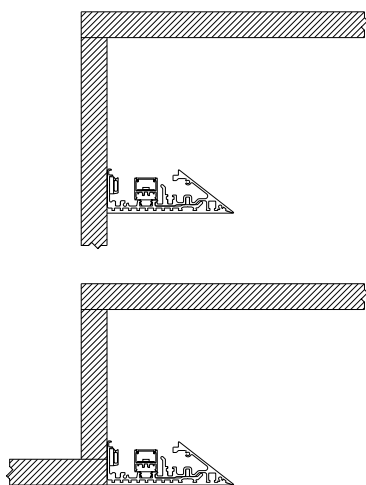

Gypsum Ceiling Mounting Options.
4" minimum offset, 12" typical offset.
Can be installed in Cove or Coffered.

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options
- See pattern spec sheet.
- Wattage shown does not include power supplies/drivers.
- Delivered lumens with satin clear diffuser shown.
- See power supply spec sheet.

