



# 100 square plaster-in wall wash

A 100 x 150mm rectangular recessed wall wash luminaire with absolute minimal visual impact.

## Applications:









- Where the ceiling is to be plastered or re-plastered with a gypsum finish.


## Features:

- 'Easy click' tool free second fix internal cartridge.
- Insert is interchangeable between lamp types and gimbal.
- Tool free lamp and gear maintenance.
- Pre-wired with a 'Plug and Play' electrical connection.
- Etched opal glass diffuser for both flush and recessed mounting positions.
- Gimbal insert can be utilised in this product. Please contact us for further information.

## Ballast options:

- Switched
- Analogue (1-10v)
- Digital (DSI)
- DALI

code	lamp	type	base	(3) watts	(3) lumen	cut-out
P100SWW-LVC (2)	 Low voltage capsule	QTax-12	GY6.35	20-50W	320-930 lm	120 x 170 mm
P100SWW-MVC (2)	 Mains voltage capsule	QT14	G9	25-60W	260-820 lm	120 x 170 mm
P100SWW-CDM-SM (2)	 Ceramic metal halide supermini	CDM-SM	GU6.5	35W	2200 lm	120 x 170 mm
P100SWW-LED (2)	 LED	for LED options please refer to page 54				120 x 170 mm
P100SWWRD-LVC (1)	 Low voltage capsule	QTax-12	GY6.35	20-50W	320-930 lm	120 x 170 mm
P100SWWRD-MVC (1)	 Mains voltage capsule	QT14	G9	25-60W	260-820 lm	120 x 170 mm
P100SWWRD-CDM-SM (1)	 Ceramic metal halide supermini	CDM-SM	GU6.5	35W	2200 lm	120 x 170 mm
P100SWWRD-LED (1)	 LED	for LED options please refer to page 54				120 x 170 mm

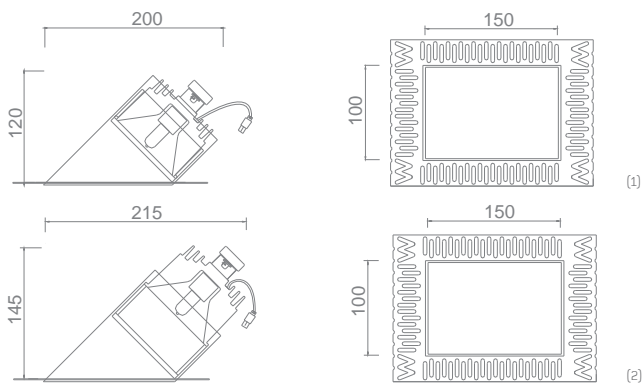

## Notes:

1. Reduced depth fitting.
  2. Standard fitting.
  3. Indicative lamp information shown. Consult lamp manufacturer for current information.
- Glass position can be selected without the use of tools
  - A reduced depth fitting is available. Please specify RD (reduced depth) on the product code (for example: P100SWWRD-...).



## Other information:

Set out guide	Page 154
Important information	Page 181
Accessories	Page 185



# 100 square plaster-in wall wash LED

A 100 x 150mm square recessed luminaire with absolute minimal visual impact. Available with a range of market leading LED light engines with excellent colour consistency and light output.







Available in 700 lumen, 1100 lumen output and "Artist" version with excellent colour rendering of over 95 Ra.

### Applications:

- Where the ceiling is to be plastered or re-plastered with a gypsum finish.


### Features:

- 'Easy click' tool free second fix internal cartridge.
- Insert is interchangeable between lamp types and gimbal.
- Tool free driver maintenance.
- Pre-wired with a 'Plug and Play' electrical connection.
- Etched opal glass diffuser for both flush and recessed mounting positions.
- Retro-fittable into existing 100 Downlight frame.
- Gimbal insert can be utilised in this product. Contact us for further information.
- Whitegoods offers true sustainability, with its replaceable LED 'lamp' module.

code		lamp	colour temperature	CRI (Ra)	watts	lumens <sup>(2)</sup>	life (hr) <sup>(8)</sup>	cut-out
<b>Xicato</b>								
P100SWW-LED-XI-830-700		Xicato XSM-700	3000°K <sup>(3)</sup>	80	12.4W	700 lm	50k	120 x 170 mm
P100SWW-LED-XI-830-1000 *		Xicato XSM-1000	3000°K <sup>(3)</sup>	80	18.3W	1000 lm	50k	120 x 170 mm
P100SWW-LED-XI-930-700		Xicato XSM-700A	3000°K <sup>(3)</sup>	95	21.3W	700 lm	50k	120 x 170 mm
<b>Bridgelux</b>								
P100SWW-LED-BR-830-800 *		ES Array-800	3000°K <sup>(4)</sup>	82	14W	800 lm	50k	120 x 170 mm
<b>Philips</b>								
P100SWW-LED-PH-830-1100		FortimoSLM-1100	3000°K <sup>(5)</sup>	80	18W	1100 lm	50k	120 x 170 mm
<b>Osram</b>								
P100SWW-LED-OS-930-800		PrevaLED-800	3000°K <sup>(6)</sup>	90	11W	800 lm	50k	120 x 170 mm

### Notes:

1. Reduced depth fitting.
  2. standard fitting.
  3. Available in 827 (2700K), 830 (3000K) or 840 (4000K).
  4. Available in 830 (3000K) or 840 (4000K)
  5. Available in 830 (3000K), 835 (3500K) or 840 (4000K).
  6. Available in 930 (3000K) or 940 (4000K).
  7. Absolute range of lumen output is +/-10% of typical value stated.
  8. Until 70% lumen maintenance (Projected lifetime).
- A reduced depth fitting is available, please order additional product RDB-100LED to allow for a reduced depth fitting.
  - Dimming versions available: -phase dim; 0-10 or DALI.
  - LED specification subject to change. See our website for the latest info.
  - Glass position can be selected without the use of tools.
  - Codes marked '\*' are stock items
  - All technical data is subject to manufacturer's published data

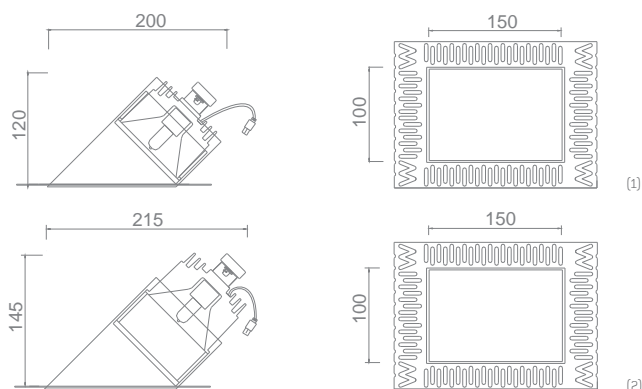

### Other information:

Set out guide	Page 154
100 LED Lamp information	Page 179
Important information	Page 181