


300 panel plaster-in luminaire

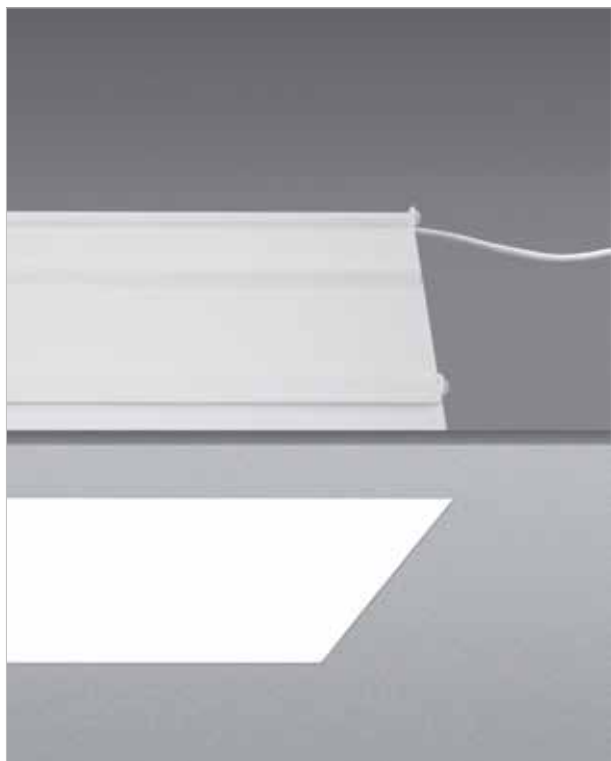

A 300mm panel recessed luminaire with absolute minimal visual impact.

Applications:

- Where the ceiling is to be plastered or re-plastered with a gypsum finish.


Features:

- Twin lamp configuration.
- Twin overlapping lamp configuration on four lamp units.
- Single tool second fix internal lamp cartridge.
- Tool free lamp and gear maintenance.
- Internal cartridges with pre-wired plug connectors for efficient installation.

Ballast options:

- Switched
- Analogue (1-10v)
- Digital (DSI)
- DALI

code	lamp	type	base	watts	lumen	cut-out
P300LDL6	↔ T5 fluorescent	T5	G5	3x14W	4050 lm	620 x 320 mm
P300LDL9	↔ T5 fluorescent	T5	G5	3x21W	6300 lm	920 x 320 mm
P300LDL12	↔ T5 fluorescent	T5	G5	3x28W	8700 lm	1220 x 320 mm
P300LDL15	↔ T5 fluorescent	T5	G5	3x35W	10950 lm	1520 x 320 mm
P300LDL18	↔ T5 fluorescent	T5	G5	6x14W, 3x21W	14400 lm	1820 x 320 mm
P300LDL24	↔ T5 fluorescent	T5	G5	9x21W	18900 lm	2420 x 320 mm
P300LDL30	↔ T5 fluorescent	T5	G5	3x21W, 6x28W	23700 lm	3020 x 320 mm

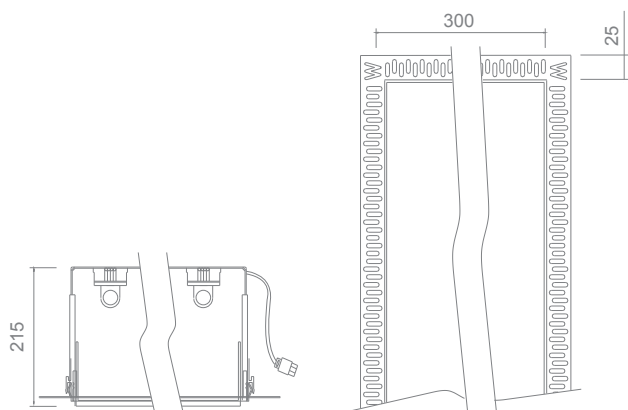

Notes:

- Available for use with rod or optional cable installation methods. Please specify when ordered.

Other information:

Important information	Page 181
Dimming	Page 182
Emergency Lighting	Page 184
Accessories	Page 185