

# 600 panel plaster-in luminaire



A 600mm panel recessed luminaire with absolute minimal visual impact.

### Applications:



- Where the ceiling is to be plastered or re-plastered with a gypsum finish.


### Features:

- Twin lamp configuration.
- Twin overlapping lamp configuration on four lamp units.
- Single tool second fix internal lamp cartridge.
- Tool free lamp and gear maintenance.
- Internal cartridges with pre-wired plug connectors for efficient installation.

### Ballast options:

- Switched
- Analogue (1-10v)
- Digital (DSI)
- DALI

code	lamp	type	base	watts	lumen	cut-out
P600LDL6	 T5 fluorescent	T5	G5	4 x 14W	5400 lm	620 x 620 mm
P600LDL9	 T5 fluorescent	T5	G5	4 x 21W	8400 lm	920 x 620 mm
P600LDL12	 T5 fluorescent	T5	G5	4 x 28W	11600 lm	1220 x 620 mm
P600LDL15	 T5 fluorescent	T5	G5	4 x 35W	14600 lm	1520 x 620 mm
P600LDL18	 T5 fluorescent	T5	G5	8x14W, 4x21W	15000 lm	1820 x 620 mm
P600LDL24	 T5 fluorescent	T5	G5	12 x 21W	25200 lm	2420 x 620 mm
P600LDL30	 T5 fluorescent	T5	G5	4x21W, 8x28W	67200 lm	3020 x 620 mm

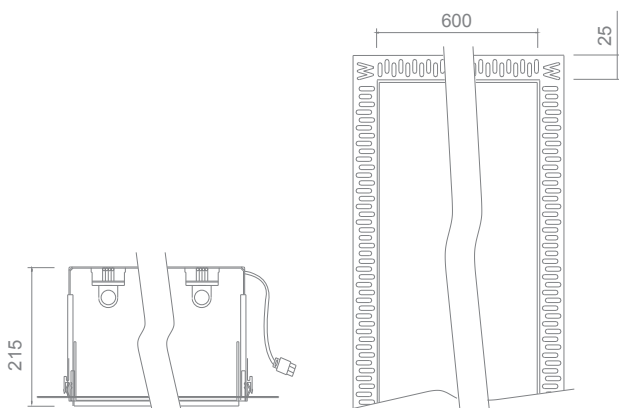

### Notes:

- Available for use with rod or optional cable installation methods. Please specify when ordered.

### Other information:

Important information	Page 181
Dimming	Page 182
Emergency Lighting	Page 184
Accessories	Page 185