


60 linear plaster-in luminaire

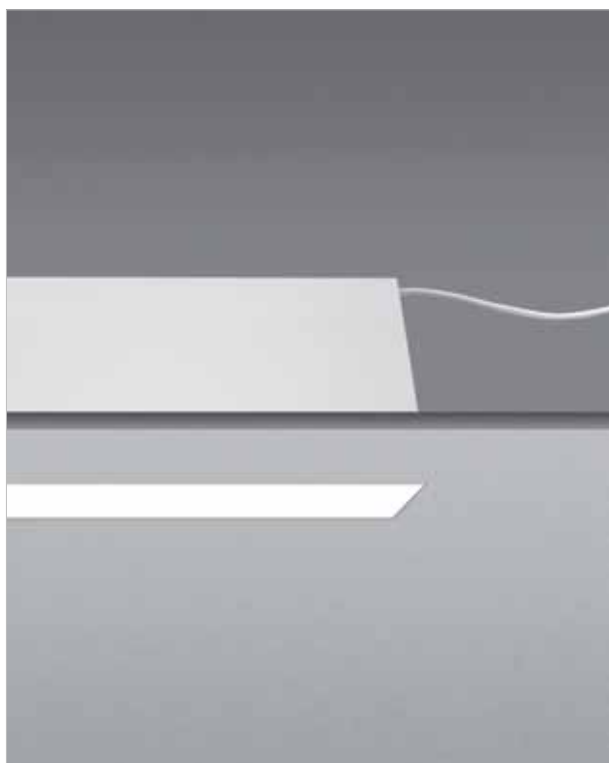

A 60mm linear recessed luminaire with absolute minimal visual impact.

Applications:

- Where the ceiling is to be plastered or re-plastered with a gypsum finish.


Features:

- Single lamp configuration.
- Single overlapping lamp configuration on two lamp units.
- Single tool second fix internal lamp cartridge.
- Tool free lamp and gear maintenance.
- Internal cartridges with pre-wired plug connectors for efficient installation.
- Twin lamp configuration available.

Ballast options:

- Switched
- Analogue (1-10v)
- Digital (DSI)
- DALI

code	lamp	type	base	watts	lumen	cut-out
P60LDL6-114*	↔ T5 fluorescent	T5	G5	1 x 14W	1200 lm	620 x 75 mm
P60LDL9-121*	↔ T5 fluorescent	T5	G5	1 x 21W	1900 lm	920 x 75 mm
P60LDL12-128*	↔ T5 fluorescent	T5	G5	1 x 28W	2600 lm	1220 x 75 mm
P60LDL15-135*	↔ T5 fluorescent	T5	G5	1 x 35W	3300 lm	1520 x 75 mm
P60LDL18-1(14-21-14)	↔ T5 fluorescent	T5	G5	1 x 21W; 2 x 14W	4300 lm	1820 x 75 mm
P60LDL24-321	↔ T5 fluorescent	T5	G5	3 x 21W	5700 lm	2420 x 75 mm
P60LDL30-121-228	↔ T5 fluorescent	T5	G5	1 x 21W; 2 x 28W	7100 lm	3020 x 75 mm

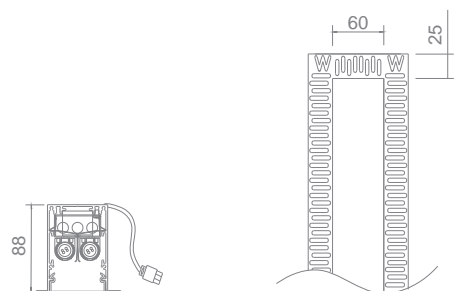

Notes:

- Continuous linear available. Please refer to page 121.
- Available for use with rod or optional cable installation methods. Please specify when ordered. Please allow 50mm minimum above luminaire for installation of suspension system.
- * Twin lamp configuration available.

Other information:

Important information	Page 181
Dimming	Page 182
Emergency Lighting	Page 184
Accessories	Page 185