


# 20 Linear Direct/Indirect Surface Wall Mount - Wall Mounted Application

WG 20LDI-SW-S

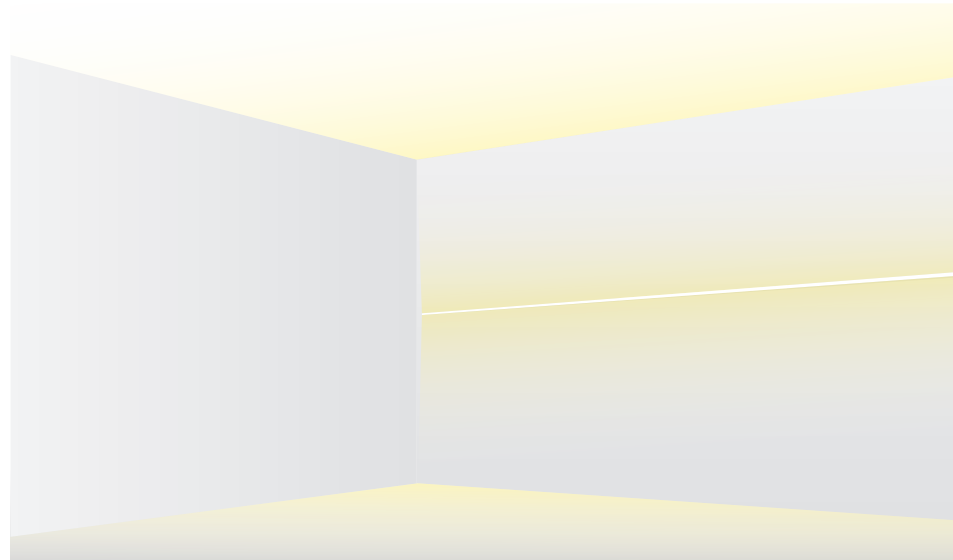


The diagrams show the light level achieved on ceiling and floor at the given distance from a continuous wall mounted luminaire, at the ceiling heights shown.

The 20 Linear Direct/Indirect Surface Wall Mounted delivers a genuinely useful amount of light, both up and down, from what is really a very small luminaire, making it easy to integrate into all sorts of situations.

What's more, you can have separate upward and downward lighting elements. Output and / or color temperature can be specified separately, and even switched or dimmed separately too.

A truly versatile lighting tool.

## 9' Ceiling

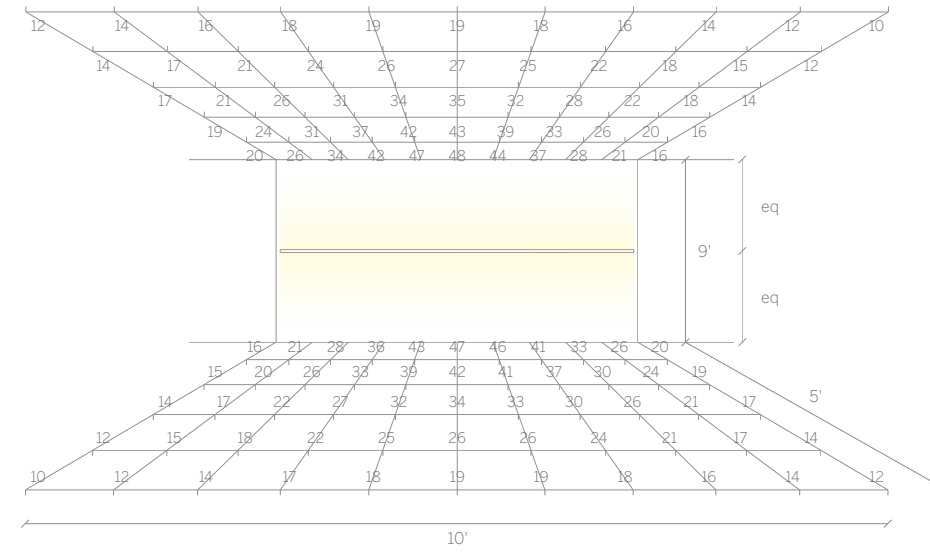

The diagrams show the expected light level on the floor and ceiling adjacent to a surface wall mounted luminaire at the center of the wall indicated.

Other mounting heights will alter the results.

Calculated on the following basis:

### Reflectances

Ceiling 70%  
Walls 50%  
Floor 20%

### Maintenance factor

1.0


### LED

Medium Power  
3000 Kelvin  
90 CRI

### Diffuser

Satin Opal

## 12' Ceiling

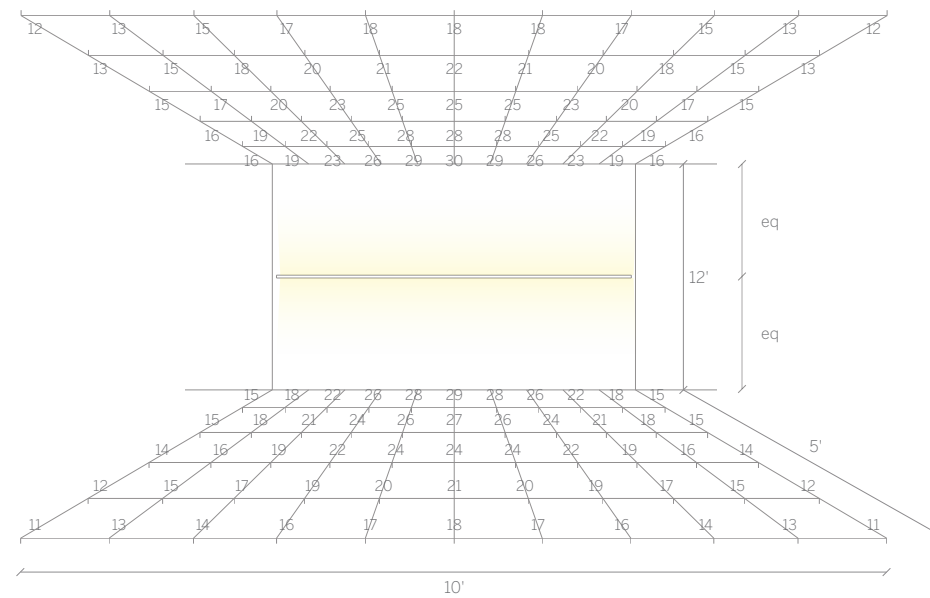


Values in Foot Candles

Calculated on the following basis:


Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	69lm/ft*	Satin Opal
Walls 50%		3000 Kelvin	
Floor 20%		90 CRI	

## Mounting and Recommended Spacing

20 Linear Direct/Indirect  
Surface Wall Mount

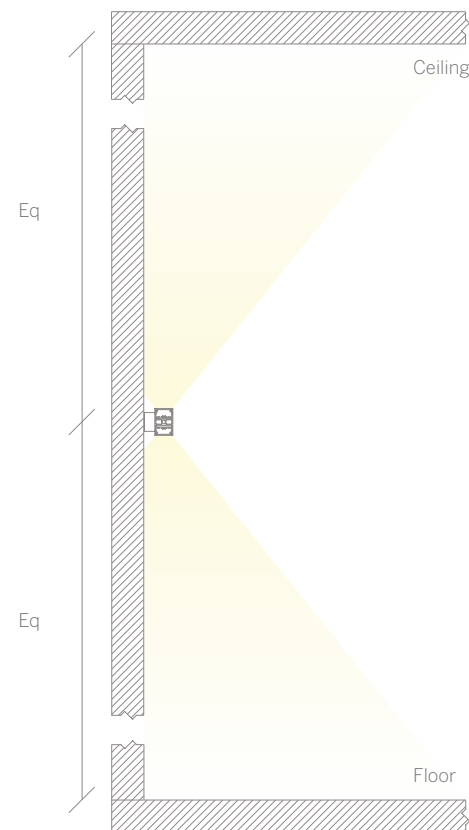

WG 20LDI-SW-S  
Surface Wall Mount



### 20 Linear Direct/Indirect Surface Wall Mount

Product Details 140-143