


20 Linear Direct/Indirect Surface Wall Mount - Wall Mounted Application

WG 20LDI-SW-S

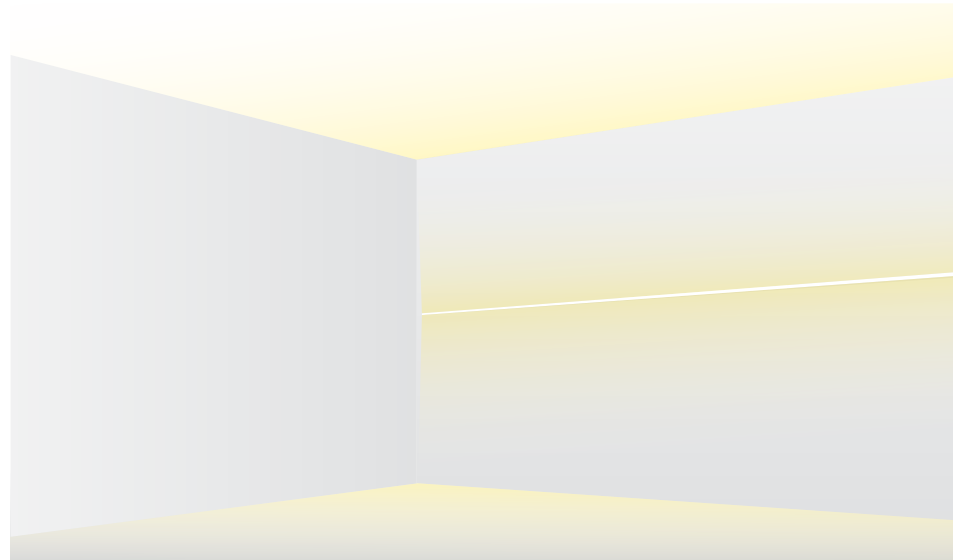


The diagrams show the light level achieved on ceiling and floor at the given distance from a continuous wall mounted luminaire, at the ceiling heights shown.

The 20 Linear Direct/Indirect Surface Wall Mounted delivers a genuinely useful amount of light, both up and down, from what is really a very small luminaire, making it easy to integrate into all sorts of situations.

What's more, you can have separate upward and downward lighting elements. Output and / or colour temperature can be specified separately, and even switched or dimmed separately too.

A truly versatile lighting tool.

2700mm Ceiling

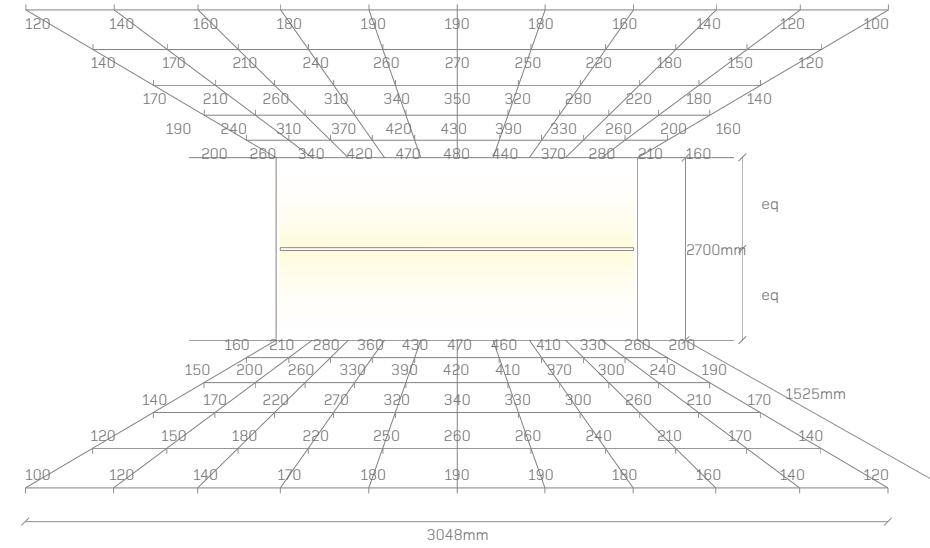

The diagrams show the expected light level on the floor and ceiling adjacent to a surface wall mounted luminaire at the centre of the wall indicated.

Other mounting heights will alter the results.

Calculated on the following basis:

Reflectances

Ceiling 70%
Walls 50%
Floor 20%

Maintenance factor

1.0

LED


Medium Power
3000 Kelvin
90 CRI

Diffuser


Satin Opal

Mounting and Recommended Spacing


20 Linear Direct/Indirect
Surface Wall Mount

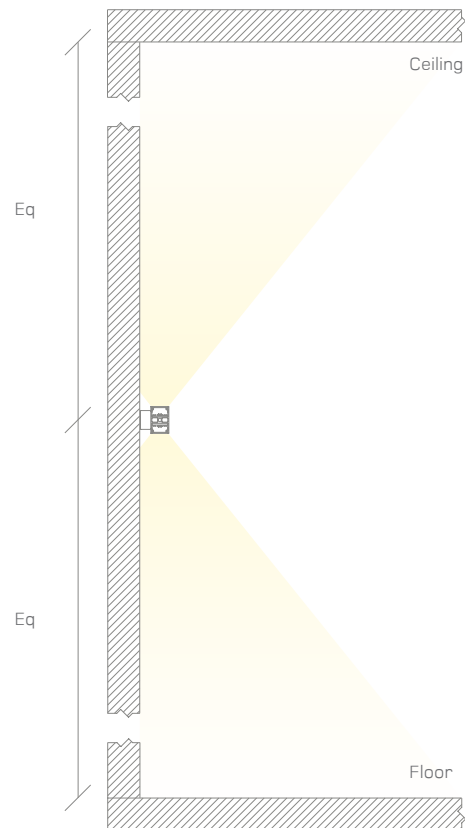

WG 20LDI-SW-S
Surface Wall Mount



3650mm Ceiling

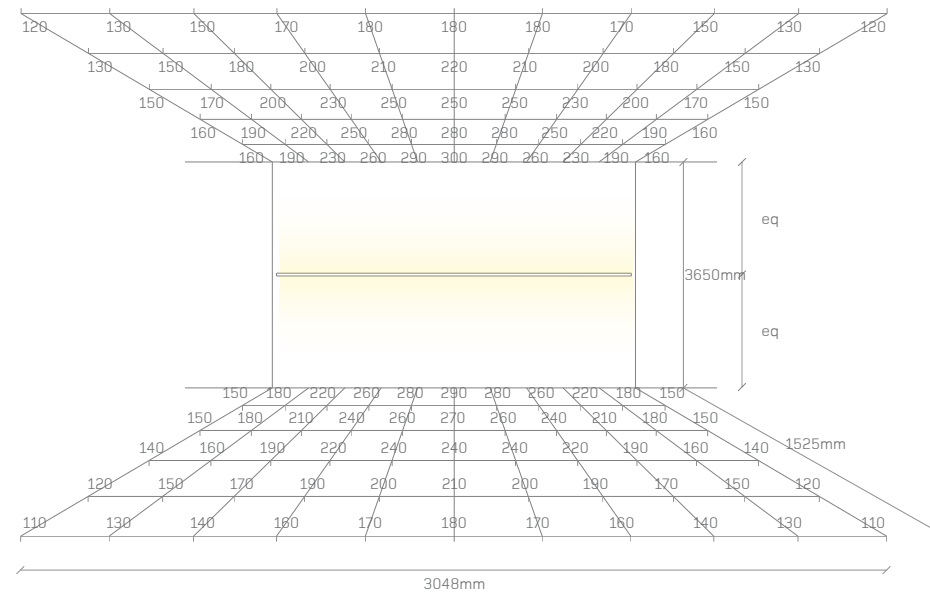

Values in Lux

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	2270lm/m*	Satin Opal
Walls 50%		3000 Kelvin	
Floor 20%		90 CRI	

20 Linear Direct/Indirect Surface
Wall Mount

Product Details 140-143