

# 150 Square Floor Wash LED

whitegoods

Project Title: .....

Luminaire Ref: .....



plaster-in

Ordering Information				
Code	Module	Dimming	Voltage	Emergency
<b>P150SCFW*</b> plaster-in	<b>CL-830-1500*</b> 80 CRI 12.9W 1500 lm	<b>ND</b> non-dim <b>0-10V</b> 0-10 Volt dim <b>1-10V</b> 1-10 Volt dim <b>TR</b> trailing edge dim <b>DALI</b> DALI protocol	<b>220-240V</b> standard <b>120 - 277V</b> universal	<b>EMND</b> non-dim <b>EMST</b> self-test <b>EMDA</b> DALI
<b>B150SCFW*</b> bezel				

\* Items available for Quickship

## Product Description

A 150mm low level floor wash luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact.

## Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

## Cut-out

170 x 170 mm



Fixture requires 130mm wall gap for installation.

## Example LED module codes

CL-830-1500

CL = Cited

830 = 80CRI, 3000K colour temperature

1500 = up to 1500 lumen package

## Examples of typical output options

CL-827/830/840

Run @ 350mA = 1525lm, 12.9W

## Dimming

- ND: non-dimming
- 0-10V: 0-10 Volt dimming, min 0.1%
- 1-10V: 1-10 Volt dimming, min 0.1%
- TR: trailing edge dimming
- DALI: DALI protocol, min 0.1%

All drivers are suitable for remote mounting up to 10 meters from fixture. Longer distances are available on request.

## Emergency

EMND: emergency non-dimmable



EMST: emergency self-test

EMDA: emergency DALI protocol

## Note

- Manufacturing LED module detail shown. Refer to photometry data for typical results.
- All LED modules available in 2700, 3000, 3500 and 4000 Kelvin.
- Luminaires rated at 40°C maximum ambient temperature.

Minimum wall gap for emergency system is required, contact Whitegoods for further details.

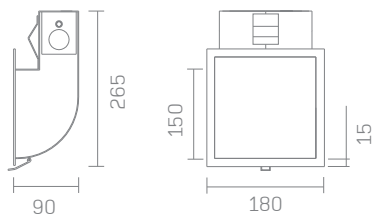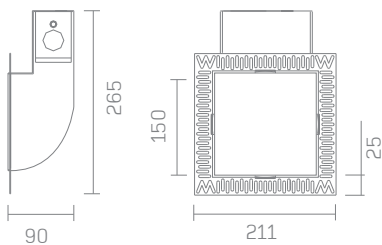

## Specifier Details