


# 60 Linear Surface Mounted and Suspended LED


whitegoods

Project Title: .....

Luminaire Ref: .....

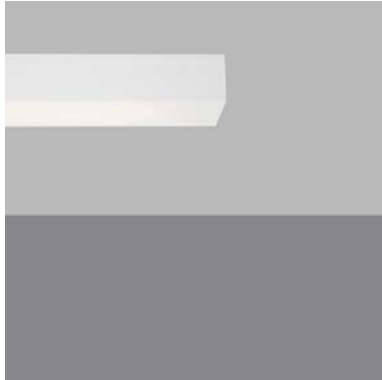

surface mount

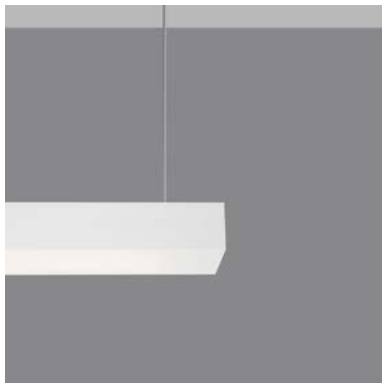

suspended

## Product Codes & Description (Ordering information)

Frame	LED module	Lumens lm/m	Length (mm)	Dimming	Voltage	Emergency
<b>SM60L</b> surface mount	<b>CC-827</b> 80 CRI	<b>1300*</b> 13.9W per meter	<b>Specify length</b>	<b>ND*</b> non-dim <b>0-10V</b> 0-10 Volt dim <b>1-10V</b> 1-10 Volt dim <b>DALI</b> DALI protocol	<b>220-240V</b> standard <b>120-277V</b> universal	<b>EMND</b> non-dim <b>EMST</b> self-test <b>EMDA</b> DALI
	<b>CC-830*</b> 80 CRI	<b>1600*</b> 21.0W per meter				
<b>SP60L</b> suspended	<b>CC-840</b> 80 CRI	<b>2400</b> 33.0W per meter				

\* Items available for Quickship

### Product Description

A 60mm continuous surface mounted or suspended downlight with minimal visual impact. Can be specified to any desired length.

### Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

### Example LED module code

CC-830-1600

CC = Whitegoods constant current LED  
830 = 80CRI, 3000K colour temperature  
1600 = up to 1600 lumen per meter

### Examples of typical output options

Module: CC-827/830/835/840

Run @ 500mA = 1300lm/m, 13.9W/m

Run @ 700mA = 1600lm/m, 21W/m

Run @ 1050mA = 2400lm/m, 33W/m

### Data shown is delivered lumens [3000K]

### Dimming (Driver integral)

- ND: non-dimming
- 0-10V: 0-10 Volt dimming, min 1%
- 1-10V: 1-10 Volt dimming, min 1%
- DALI: DALI protocol, min 1%



### Emergency

EMND: emergency non-dimmable  
EMST: emergency self-test  
EMDA: emergency DALI protocol

### Note

- Indicative LED information shown. Refer to photometry data for typical results.
- All LED boards available in 2700, 3000, 3500 and 4000 Kelvin.
- Luminaires rated at 40°C maximum ambient temperature.

Please contact Whitegoods for further LED specifications.



### Specifier Details