


100 Round Wallwash 22 LED


whitegoods

Project Title:




Luminaire Ref:

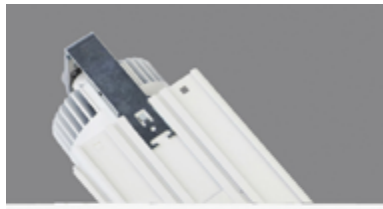

plaster-in

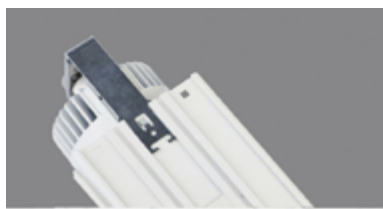

bezel



Specifier Details

| Ordering Information | | | | | | | |
|----------------------------|-------------------|----------------------|-------------------|----------------------|---------------------------|----------------|---------|
| Frame | LED ¹ | Rated Lumens | Beam ^o | Voltage ² | Power Supply | Diffuser | Options |
| WG-P100RWW22 plaster-in | 80 CRI XTD-827 | 2000 15.2W | 25 46 | STD UNV | S D010 D110 DALI | CG FR MP | EM |
| | XTD-830 | 1490 | | | | | |
| WG-B100RWW22 plaster-in | XTD-835 | 10.6W | | | | | |
| | XTD-840 | | | | | | |
| | 95 CRI XTD-927 | 1300 13.3W | | | | | |
| | XTD-930 | 965 | | | | | |
| | XTD-935 | 9.2W | | | | | |
| | XTD-940 | | | | | | |

For North America specification please visit inter-lux.com/products/100-round-wallwash-22/

Luminaire

- Trimless 'plaster-in' or bezel trim oval angled gimbal for drywall ceilings with 22.5° tilt.
- Installation from below for remodel or new construction.
- 'Easy click' tool free installation of diecast aluminum lamp insert module.
- Diecast aluminum trim housing with heavy gauge galvanized steel yoke with removable jbox from below ceiling.
- Pre-wired with a 'Plug and Play' electrical connection.
- Adjustable frosted diffuser (standard), other diffusers available.
- Powder coat painted white - RAL 9010.

LED¹

Xicato XTM 80 Series, 80 CRI

- XTD-827 = 2700K
- XTD-830 = 3000K
- XTD-835 = 3500K
- XTD-840 = 4000K

Xicato XTM Artist Series, 95 CRI

- XTD-927 = 2700K
- XTD-930 = 3000K
- XTD-935 = 3500K
- XTD-940 = 4000K

Rated Lumens³

Xicato XTM 80 Series, 80 CRI

- 2000 = 2000 lm @ 700mA, 15.2W
- 1490 = 1490 lm @ 500mA, 10.6W

Xicato XTM Artist Series, 95 CRI

- 1300 = 1300 lm @700mA, 13.3W
- 965 = 965 lm @500mA, 9.2W

Beam^o

- 25 = 24.7° accent illumination
- 46 = 46.3° general illumination

Voltage²

- STD = 220-240V
- UNV = 120-277V (excludes N. America)

Power Supply (remote)

- S = Standard driver, non-dimming
- D010 = 0-10V dimming, min 1%
- D110 = 1-10 Volt dimming, min 1%
- DALI = DALI protocol, min 1%

Diffuser (frosted diffuser standard)

- CG = clear glass
- FR = frosted diffuser
- MP = micro prism glass

Options

- EM = Contact factory for emergency lighting options.

Notes

- 1 Other lumen packages available, consult factory.
- 2 For specification of Whitegoods products in North America please visit inter-lux/whitegoods
- 3 Manufacturer LED module detail shown. Refer to photometry data for delivered lumens (LM79-08 results) on the Whitegoods website.



Whitegoods reserves the right to make technical alterations without notice.
w: www.whitegoods.com e: info@whitegoods.com

(930-20235-REVA)