

# 100 Square Ceiling / Floor Wash LED

whitegoods

Project Title: .....

Luminaire Ref: .....



Plaster-in



Bezel

Ordering Information					
Frame	LED <sup>1</sup>	Rated Lumens	Voltage <sup>2</sup>	Power Supply	Options
<b>WG-P100SCFW</b> plaster-in	80 CRI CL-827	<b>6.4W</b> 565	STD UNV	X S D010 D110 DALI	EM
<b>WG-B100SCFW</b> bezel trim	CL-830 CL-835 CL-840				

For North America specification please visit [inter-lux.com/products/60-square-ceiling-floor-wash/](http://inter-lux.com/products/60-square-ceiling-floor-wash/)

## Luminaire

- Bezel trim or trimless 'plaster-in' square ceiling or floor washer for drywall.
- Installation from room side of the wall for remodel or new construction.
- 'Easy click' tool free installation of diecast aluminum lamp insert module.
- Heavy gauge steel trim housing.
- Regressed frosted glass lens standard.
- Powder coat painted white - RAL 9010.

## Power Supply (remote)

- X = No driver (to be supplied separately)
- S = Standard driver, non-dimming
- D010 = 0-10V dimming, min 1%
- D110 = 1-10 Volt dimming, min 1%
- DALI = DALI protocol, min 1%

## Options

- EM = Contact factory for emergency lighting options.

## LED<sup>1</sup>

LED Citizen, 80 CRI


- CL-827-565 = 2700K
- CL-830-579 = 3000K
- CL-835-598 = 3500K
- CL-840-608 = 4000K

## Rated Lumens


- 565 = 565lm @ 700mA, 6.4W, 2700K
- 579 = 579lm @ 700mA, 6.4W, 3000K
- 598 = 598lm @ 700mA, 6.4W, 3500K
- 608 = 608lm @ 700mA, 6.4W, 4000K

## Voltage<sup>2</sup>

- STD = 220-240V
- UNV = 120-277V (excludes N. America)

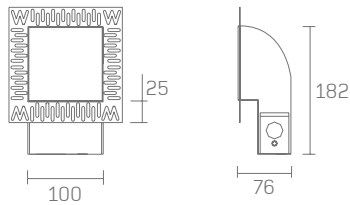

Plaster-in



Bezel

## Specifier Details

## Notes

- 1 Other lumen packages available, consult factory.
- 2 For specification of Whitegoods products in North America please visit [interlux/whitegoods](http://interlux/whitegoods)
- 3 Manufacturer LED module detail shown. Refer to photometry data for delivered lumens (LM79-08 results) on the Whitegoods website.