

Project Title: .....


Luminaire Ref: .....



plaster-in



bezel

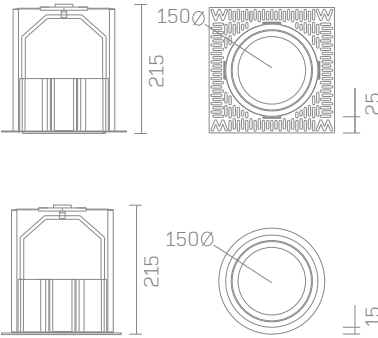

Specifier Details

Ordering Information							
Frame	LED <sup>1</sup>	Rated Lumens	Beam°	Voltage <sup>2</sup>	Power Supply	Accessories	Options
<b>WG-P150RRG</b> plaster-in	80 CRI XTD-827	<b>2000</b> 15.2W	25 46	STD UNV	S D010 D110 DALI	AL AS FR	EM
	XTD-830	<b>1490</b>					
<b>WG-B150RRG</b> bezel trim	XTD-835	10.6W					
	XTD-840						
	95 CRI XTD-927	<b>1300</b> 13.3W					
	XTD-930	<b>965</b>					
	XTD-935	9.2W					
	XTD-940						

For North America specification please visit [inter-lux.com/products/150-round-gimbal/](https://inter-lux.com/products/150-round-gimbal/)

Luminaire

- Bezel trim or trimless ‘plaster-in’ round for drywall ceilings.
- Installation from below for remodel or new construction.
- ‘Easy click’ tool free installation of diecast aluminum lamp insert module.
- Pre-wired with a ‘Plug and Play’ electrical connection.
- Open aperture standard, accessories available (see options).
- 30° tilt in all directions. Powder coat painted white - RAL 9010.

LED<sup>1</sup>

Xicato XTM 80 Series, 80 CRI

- XTD-827 = 2700K
- XTD-830 = 3000K
- XTD-835 = 3500K
- XTD-840 = 4000K

Xicato XTM Artist Series, 95 CRI

- XTD-927 = 2700K
- XTD-930 = 3000K
- XTD-935 = 3500K
- XTD-940 = 4000K

Rated Lumens<sup>3</sup>

Xicato XTM 80 Series, 80 CRI

- 2000 = 2000 lm @ 700mA, 15.2W
- 1490 = 1490 lm @ 500mA, 10.6W

Xicato XTM Artist Series, 95 CRI

- 1300 = 1300 lm @700mA, 13.3W
- 965 = 965 lm @500mA, 9.2W

Beam°

- 25 = 24.7° accent illumination
- 46 = 46.3°

Voltage<sup>2</sup>

- STD = 220-240V
- UNV = 120-277V (excludes N. America)

Power Supply (integral)

- S = Standard driver, non-dimming
- D010 = 0-10V dimming, min 1%
- D110 = 1-10 Volt dimming, min 1%
- DALI = DALI protocol, min 1%

Accessories (open aperture standard)

- AL = hex louver
- AS = snoot
- FR = regressed frosted diffuser

Options

- EM = Contact factory for emergency lighting options.

Notes
1 Other lumen packages available, consult factory.
2 For specification of Whitegoods products in North America please visit <a href="https://inter-lux.com/whitegoods">inter-lux/whitegoods</a>
3 Manufacturer LED module detail shown. Refer to photometry data for delivered lumens (LM79-08 results) on the Whitegoods website.