

150 Square Ceiling / Floor Wash LED

whitegoods

Project Title:

Luminaire Ref:



Plaster-in



Bezel

Ordering Information					
Frame	LED ¹	Rated Lumens	Voltage ²	Power Supply	Options
WG-P150SCFW plaster-in	80 CRI CL-827	12.9W 1439	STD UNV	X S	EM
WG-B150SCFW bezel trim	CL-830 CL-835 CL-840	1525 1576 1588		D010 D110 DALI	

For North America specification please visit inter-lux.com/products/150-square-ceiling-floor-wash/

Luminaire

- Bezel trim or trimless 'plaster-in' square ceiling or floor washer for drywall
- Installation from room side of the wall for remodel or new construction.
- 'Easy click' tool free installation of diecast aluminum lamp insert module.
- Heavy gauge steel trim housing.
- Regressed frosted glass lens standard.
- Powder coat painted white - RAL 9010.

Power Supply (remote)

- X = No driver (to be supplied separately)
- S = Standard driver, non-dimming
- D010 = 0-10V dimming, min 1%
- D110 = 1-10 Volt dimming, min 1%
- DALI = DALI protocol, min 1%

Options

- EM = Contact factory for emergency lighting options.

LED¹

LED Citizen, 80 CRI


- CL-827-1439 = 2700K
- CL-830-1525 = 3000K
- CL-835-1576 = 3500K
- CL-840-1588 = 4000K

Rated Lumens


- 1439 = 1439lm @ 350mA, 12.9W, 2700K
- 1525 = 1525lm @ 350mA, 12.9W, 3000K
- 1576 = 1576lm @ 350mA, 12.9W, 3500K
- 1588 = 1588lm @ 350mA, 12.9W, 4000K

Voltage²

- STD = 220-240V
- UNV = 120-277V (excludes N. America)

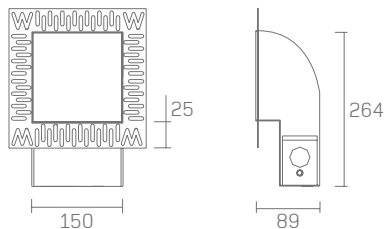

Plaster-in

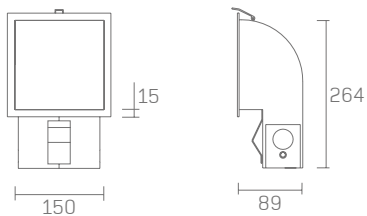

Bezel

Notes

- 1 Other lumen packages available, consult factory.
- 2 For specification of Whitegoods products in North America please visit interlux/whitegoods
- 3 Manufacturer LED module detail shown. Refer to photometry data for delivered lumens (LM79-08 results) on the Whitegoods website.

Specifier Details