

60 Square Wall Wash IP LED

whitegoods

Project Title:


Luminaire Ref:



plaster-in



bezel

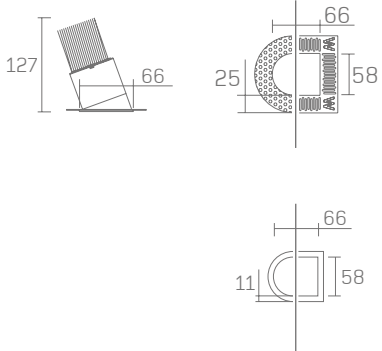

Specifier Details

Ordering Information							
Frame	LED ¹	Rated Lumens	Beam ^o	Voltage ²	Power Supply	Diffuser	Options
WG-P60SwwIP plaster-in	80 CRI XTD-827	1300 9.5W	38 54	STD UNV	X S D010 D110 DALI	CG MP	EM
	XTD-830	965					
WG-B60SwwIP bezel trim	XTD-835	6.6W	38 54	STD UNV	X S D010 D110 DALI	CG MP	EM
	XTD-840						
	95 CRI XTD-927	1300 13.3W					
	XTD-930	965					
	XTD-935	9.2W					
	XTD-940						

For North America specification please visit inter-lux.com/products/60-square-wall-wash/

Luminaire

- Bezel trim or trimless 'plaster-in' oval wall washer for drywall ceilings.
- IP65 rated, wet location (suitable for shower).
- Installation from below for remodel or new construction.
- Machined diecast aluminium lamp insert module with retaining springs and gasket.
- Heavy gauge steel trim housing.
- Tool free lamp maintenance.
- Frosted regressed diffuser standard, other diffusers available. Powder coat painted white - RAL 9010.

LED¹

Xicato XTM 80 Series, 80 CRI

- XTD-827 = 2700K
- XTD-830 = 3000K
- XTD-835 = 3500K
- XTD-840 = 4000K

Xicato XTM Artist Series, 95 CRI

- XTD-927 = 2700K
- XTD-930 = 3000K
- XTD-935 = 3500K
- XTD-940 = 4000K

Rated Lumens³

Xicato XTM 80 Series, 80 CRI

- 1300 = 1300 lm @ 700mA, 9.5W
- 965 = 965 lm @ 500mA, 6.6W

Xicato XTM Artist Series, 95 CRI

- 1300 = 1300 lm @700mA, 13.3W
- 965 = 965 lm @500mA, 9.2W

Beam^o

- 38 = 38° accent illumination
- 54 = 54° general illumination

Voltage²

- STD = 220-240V
- UNV = 120-277V (excludes N. America)

Power Supply (remote)

- X = No driver (to be supplied separately)
- S = Standard driver, non-dimming
- D010 = 0-10V dimming, min 1%
- D110 = 1-10 Volt dimming, min 1%
- DALI = DALI protocol, min 1%

Diffuser (regressed frosted standard)

- CG = regressed clear glass
- MP = regressed micro prismatic glass

Options

- EM = Contact factory for emergency lighting options.

Notes

- 1 Other lumen packages available, consult factory.
- 2 For specification of Whitegoods products in North America please visit inter-lux/whitegoods
- 3 Manufacturer LED module detail shown. Refer to photometry data for delivered lumens (LM79-08 results) on the Whitegoods website.



Whitegoods reserves the right to make technical alterations without notice.
w: www.whitegoods.com e: info@whitegoods.com

(930-20232-REVA)