



Project Title:



Luminaire Ref:

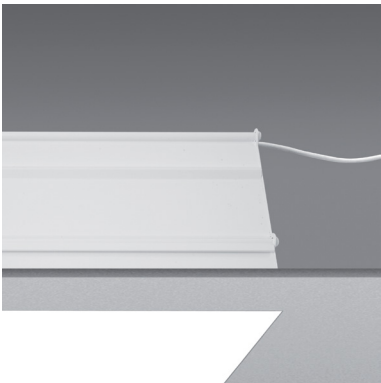

plaster-in

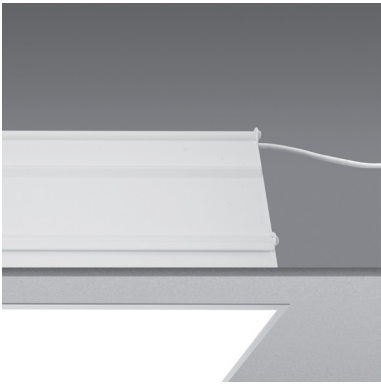

bezel

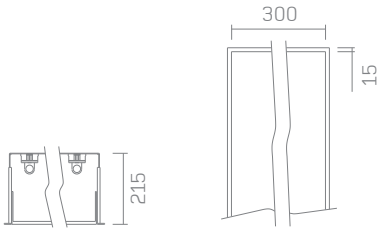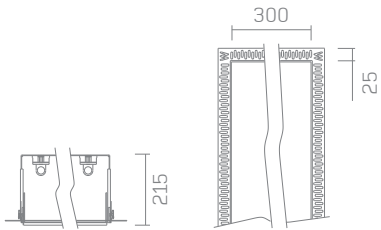

Specifier Details

Ordering Information				
Code	Length mm	Power Supply	Voltage	Emergency
P300LP plaster-in B300LP bezel	600 standard length 900mm standard length 1200mm standard length 1500mm standard length 1800mm standard length 2400mm standard length	ND* non-dim 1-10V 1-10 Volt dim DALI DALI protocol DSI Digital	220-240V* standard 120 - 277V universal	EMND non-dim EMST self-test EMDA DALI
	Specify length			

* Items available for Quickship

Product Description
A 300mm panel recessed luminaire with bezel trim or trimless ‘plaster-in’ for absolute minimal visual impact.

Lamp
T5 fluorescent
Base: G5
Lamp power: 4 x 14W
Lamp lumens: 5400 lm
Information shown based on twin lamp configuration.

Cut-out
320mm x (overall length + 20mm)

Power Supply

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10%
- DALI: DALI protocol, min 10%
- DSI: Digital

Voltage
220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency
EMND: emergency non-dimmable
EMST: emergency self-test
EMDA: emergency DALI protocol

Note
Indicative lamp information shown. Consult lamp manufacturer for current information.