

100 Linear Gimbal

whitegoods

Project Title:



Luminaire Ref:



plaster-in



bezel

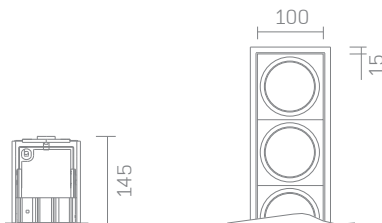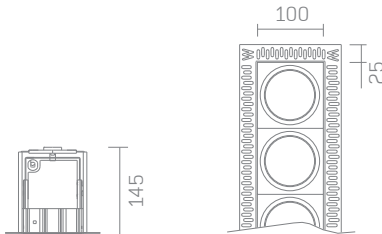

Specifier Details

Ordering Information

Code	Lamps	Module	Diffuser	Driver	Voltage	Emergency
P100LRG plaster-in B100LRG bezel	Specify number of lamps required.	LEDL/LVR* low voltage reflector LEDL/MVR* mains voltage reflector CDMR* ceramic metal halide	OA* open aperture (see accessories for available options)	ND non-dim 1-10V 1-10 Volt dim TR trailing edge dim DALI DALI protocol DSI Digital	220-240V standard 120 - 277V universal	EMND non-dim

* Items available for Quickship

Product Description

A 100mm round surface mount directional gimbal luminaire with absolute minimal visual impact.

Lamp

LEDL/LVR: LED/Low Voltage Reflector
Type: MR16
Base: GU5.3
Lamp power: max 50W
Lamp lumens: 1000-2850 lm

LEDL/MVR: LED/Mains Voltage Reflector

Type: MR16
Base: GU10
Lamp power: max 50W
Lamp intensity: 200-1100 cd

CDMR: Ceramic Metal Halide Reflector (supermini)

Type: MR16
Base: GX20
Lamp power: max 50W
Lamp intensity: 1500-20000 cd

Cut-out

115 x (length +20)

Accessories

Accessories are only available when open aperture option is selected
AC-50-F: frosted glass
AG-50-C: clear glass
AG-50-S: sculpture glass
AG-50-P: micro prismatic glass
AL-50: louvre
AS-50: snoot

Power Supply

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage

220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency

EMND: emergency non-dimmable (low voltage only)

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
- 30° tilt in all directions. Please contact Whitegoods for further lamp specifications.