


100 Round Gimbal

Project Title:

Luminaire Ref:



plaster-in

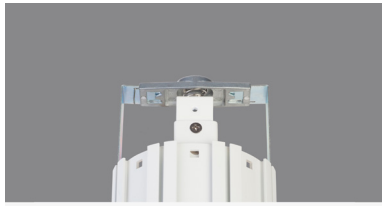

bezel



Specifier Details

Ordering Information

Code	Module	Diffuser	Driver	Voltage	Emergency
P100RRG* plaster-in	LEDR/LVR* low voltage reflector	OA* open aperture (see accessories for available options)	ND* non-dim	220-240V standard	EMND non-dim
B100RRG* bezel	LEDR/MVR* mains voltage reflector		1-10V 1-10 Volt dim TR* trailing edge dim DALI DALI protocol DSI Digital	120 - 277V universal	

* Items available for Quickship

Product Description

A 100mm round recessed luminaire with absolute minimal visual impact. Available with various adjustable diffusers for flush and regressed applications.

Lamp

LEDR/LVR: LED/Low Voltage Reflector
Type: MR16
Base: GU5.3
Lamp power: max 50W
Lamp lumens: 1000-2850 lm

LEDR/MVR: LED/Mains Voltage Reflector
Type: MR16
Base: GU10
Lamp power: max 50W
Lamp intensity: 200-1100 cd

CDMR: Ceramic Metal Halide Reflector (supermini)
Type: MR16
Base: GX20
Lamp power: max 50W
Lamp intensity: 1500-20000 cd

Cut-out

Ø 115 mm

Accessories

Accessories are only available when open aperture option is selected

- AC-50-F: frosted glass
- AG-50-C: clear glass
- AG-50-S: sculpture glass
- AG-50-P: micro prismatic glass
- AL-50: louvre
- AS-50: snoot

Power Supply

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage

220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency

EMND: emergency non-dimmable (low voltage only)

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
 - 30° tilt in all directions.
- Please contact Whitegoods for further lamp specifications.