

100 Round Wall Wash

whitegoods

Project Title:

Luminaire Ref:



plaster-in

Ordering Information					
Code	Module	Diffuser	Driver	Voltage	Emergency
P100RWW* plaster-in	LVC* low voltage capsule	FRG* frosted glass	ND non-dim	220-240V standard	EMND non-dim
P100RWWRD plaster-in	MVC* mains voltage capsule	CLG clear glass	1-10V 1-10 Volt dim	120-277V universal	
	CDM-SM* ceramic metal halide supermini	SCG sculpture glass	TR trailing edge dim		
		MPG micro prismatic glass	DALI DALI protocol		
			DSI Digital		

* Items available for Quickship

Product Description

A 100 x 150mm oval recessed wall wash luminaire with absolute minimal visual impact. Available with various adjustable glass diffusers.

Lamp

LVC: low voltage capsule
Type: QTax-12
Base: GY6.35
Lamp power: 20-50W
Lamp lumens: 320-930 lm

MVC: mains voltage capsule
Type: QT14
Base: G9
Lamp power: 25-60W
Lamp lumens: 260-820 lm

CDM-SM: ceramic metal halide supermini
Type: CDM-SM
Base: GU6.5
Lamp power: 35W
Lamp lumens: 2200 lm

Cut-out

oval 120 x 170 mm

Driver

- ND: non-dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage

220-240V AC 50-60Hz
120-277V universal AC 50-60Hz


Emergency

EMND: emergency non-dimmable (available for LVC and CFL only)

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
- RD (reduced depth) only allows flush diffuser position see detail b.

Please contact Whitegoods for further lamp specifications.

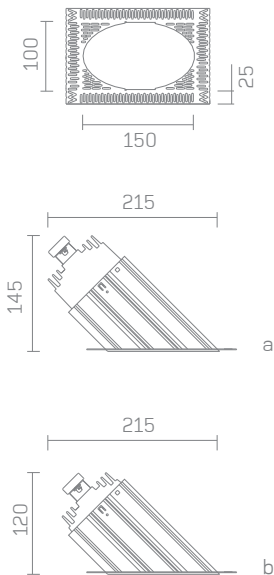

Specifier Details