

150 Round Wall Wash Recessed Gimbal

whitegoods

Project Title:

Luminaire Ref:



plaster-in

Ordering Information					
	Module	Diffuser	Power Supply	Voltage	Emergency
P150RWWG plaster-in	LVAR111/LEDR111* low voltage metal reflector/ LED metal reflector CDM-TC* ceramic discharge metal halide CDMR111* ceramic discharge metal reflector	OA* open aperture (see accessories for available options.)	ND non-dim 1-10V 1-10 Volt dim TR trailing edge dim DALI DALI protocol DSI Digital	220-240V standard 120-277V universal	EMND non-dim

* Items available for Quickship

Product Description

A 150 x 225mm oval wall wash luminaire recessed directional gimbal luminaire with absolute minimal visual impact.

Lamp

LVAR111: low voltage reflector
Type: AR111
Base: G53
Lamp power: 35-100W
Lamp lumens: 8500 lm

LEDR111: low voltage reflector
Type: LEDR111
Base: G53
Lamp power: -
Lamp lumens: -

CDM-TC: ceramic discharge metal halide
Type: CDM-TC
Base: G8.5
Lamp power: 35-70W
Lamp lumens: 2200-6000 lm

CDMR111: ceramic discharge metal reflector
Type: CDMR111
Base: GX8.5
Lamp power: 35-70W
Lamp lumens: 4225 lm

Cut-out

Oval 170 x 245 mm

Accessories

Accessories are only available when open aperture option is selected
AC-110-F: frosted glass
AG-110-C: clear glass
AG-110-S: sculpture glass
AG-110-C: micro prismatic glass
AL-110: louvre
AS-110: snoot

Power Supply

- ND: non-dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage


220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency

EMND: emergency non-dimmable (available for LVC and CFL only)

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
 - 30° tilt in all directions.
- Please contact Whitegoods for further lamp specifications.

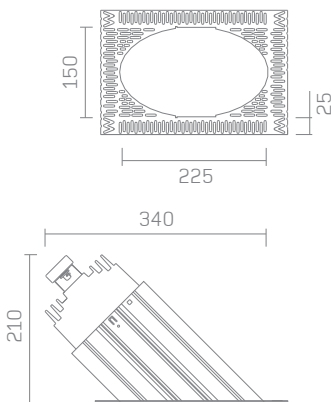

Specifier Details

For more product information visit:
www.whitegoods.com/downloads