



200 Square Gimbal

Project Title:

Luminaire Ref:

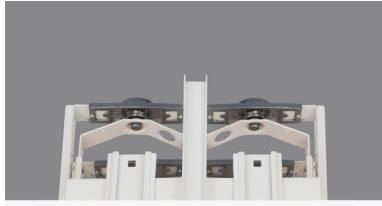

plaster-in

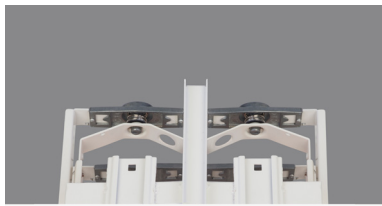

bezel



Specifier Details

Ordering Information

Code	Module	Diffuser	Driver	Voltage	Emergency
P200SRG plaster-in	LEDR/LVR* low voltage reflector	OA* open aperture (see accessories for available options)	ND* non-dim	220-240V* standard	EMND non-dim
B200SRG bezel	LEDR/MVR* mains voltage reflector		1-10V 1-10 Volt dim TR* trailing edge dim	120 - 277V universal	
	CDMR* ceramic metal halide		DALI DALI protocol DSI Digital		

* Items available for Quickship

Product Description

A 200mm square recessed directional multiple head gimbal luminaire with absolute minimal visual impact

Lamp

LEDR/LVR: LED/Low Voltage Reflector
Type: MR16
Base: GU5.3
Lamp power: max 50W
Lamp lumens: 1000-2850 lm

LEDR/MVR: LED/Mains Voltage Reflector
Type: MR16
Base: GU10
Lamp power: max 50W
Lamp intensity: 200-1100 cd

CDMR: Ceramic Metal Halide Reflector (supermini)
Type: MR16
Base: GX20
Lamp power: max 50W
Lamp intensity: 1500-20000 cd

Cut-out

220 x 220 mm

Accessories

Accessories are only available when open aperture option is selected

AC-50-F: frosted glass
AG-50-C: clear glass
AG-50-S: sculpture glass
AG-50-P: micro prismatic glass
AL-50: louvre
AS-50: snoot

Power Supply

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage

220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency

EMND: emergency non-dimmable (low voltage only)

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
 - 30° tilt in all directions.
- Please contact Whitegoods for further lamp specifications.