

# 60 Round Directional Downlight


whitegoods

Project Title: .....


Luminaire Ref: .....



plaster-in

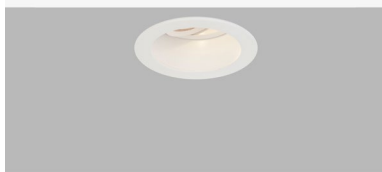

bezel



## Ordering Information

Code	Lamp	Diffuser	Driver	Voltage	Emergency
<b>P60RDDL*</b> plaster-in	<b>LEDR/LVR*</b> low voltage reflector	<b>OA*</b> open aperture (see accessories for available options)	<b>ND</b> non-dim	<b>220-240V</b> standard	<b>EMND</b> non-dim
<b>B60RDDL*</b> bezel	<b>LEDR/MVR*</b> mains voltage reflector <b>CDMR*</b> ceramic metal halide		<b>1-10V</b> 1-10 Volt dim <b>TR</b> trailing edge dim <b>DALI</b> DALI protocol <b>DSI</b> Digital	<b>120 - 277V</b> universal	

\* Items available for Quickship

## Product Description

A 60mm round recessed directional downlight luminaire with absolute minimal visual impact. Lamp position is regressed 30mm as standard.

### Lamp

LEDR/LVR: LED/Low Voltage Reflector  
Type: MR16  
Base: GU5.3  
Lamp power: max 50W  
Lamp lumens: 1000-2850 lm

LEDR/MVR: LED/Mains Voltage Reflector  
Type: MR16  
Base: GU10  
Lamp power: max 50W  
Lamp intensity: 200-1100 cd

CDMR: Ceramic Metal Halide Reflector (supermini)  
Type: MR16  
Base: GX20  
Lamp power: max 50W  
Lamp intensity: 1500-20000 cd

### Cut-out

Ø 70 mm

### Accessories

AG-50-F: frosted glass  
AG-50-C: clear glass  
AG-50-S: sculpture glass  
AG-50-P: micro prismatic glass  
AL-50: louvre  
AS-50: Snoot

### Driver

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

### Voltage

220-240V AC 50-60Hz.  
120-277V universal AC 50-60Hz.

### Emergency

EMND: emergency non-dimmable (low voltage only)

### Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

### Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
- Lamp is recessed 30mm back from the ceiling.
- Recessed depth required is 110mm for LVR and MVR lamps, 170mm for CDM and emergency.
- 22° tilt movement.
- 170mm recess depth is required for CMH lamps and emergency.

Please contact Whitegoods for further lamp specifications.

## Specifier Details