


60 Square Downlight IP


whitegoods

Project Title:



Luminaire Ref:

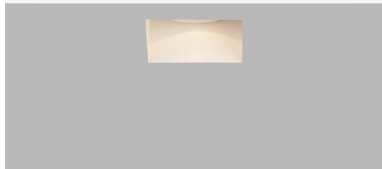

plaster-in

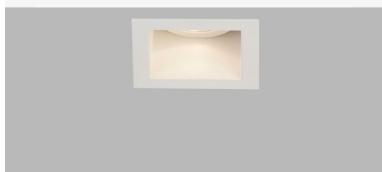

bezel



Ordering Information

Code	Lamp	Diffuser	Driver	Voltage	Emergency
P60SDL-IP* plaster-in	LEDL/LVR* low voltage reflector	FRG* frosted glass	ND non-dim	220-240V standard	EMND non-dim
B60SDL-IP* bezel	LEDL/MVR* mains voltage reflector CDMR* ceramic metal halide		1-10V 1-10 Volt dim TR trailing edge dim DALI DALI protocol DSI Digital	120 - 277V universal	

* Items available for Quickship

Product Description

A 60mm IP65 rated square recessed luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact. Lamp position is recessed 30mm as standard.

Lamp

LEDL/LVR: LED/Low Voltage Reflector
Type: MR16
Base: GU5.3
Lamp power: max 50W
Lamp lumens: 1000-2850 lm

LEDL/MVR: LED/Mains Voltage Reflector
Type: MR16
Base: GU10
Lamp power: max 50W
Lamp intensity: 200-1100 cd

CDMR: Ceramic Metal Halide Reflector (supermini)
Type: MR16
Base: GX20
Lamp power: max 50W
Lamp intensity: 1500-20000 cd

Cut-out

70 x 70 mm

Accessories

AG-50-C: clear glass
AG-50-S: sculpture glass
AG-50-P: micro prismatic glass

Driver

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

Voltage

220-240V AC 50-60Hz.
120-277V universal AC 50-60Hz.

Emergency

EMND: emergency non-dimmable (low voltage only)

Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
- Lamp is recessed 30mm back from the ceiling.
- Recessed depth required is 110mm for LVR and MVR lamps, 170mm for CDM and emergency.
- 170mm recess depth is required for CMH lamps and emergency.

Please contact Whitegoods for further lamp specifications.

Specifier Details