

Large Area Panel

Project Title:

Luminaire Ref:



plaster-in



bezel

Ordering Information

Code	Length mm	Power Supply	Voltage	Emergency
PLAP plaster-in	Specify length length (mm) x width (mm)	ND non-dim	220-240V* standard 120 - 277V universal	EMND non-dim EMST self-test EMDA DALI
BLAP bezel		1-10V 1-10 Volt dim DALI DALI protocol DSI Digital		

* Items available for Quickship

Product Description

A recessed panel luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact. Specified to any desired length and width

Lamp

T5 fluorescent
Base: G5
Lamp power: 4 x 14W
Lamp lumens: 5400 lm
Information shown based on twin lamp configuration.

Voltage

220-240V AC 50-60Hz
120-277V universal AC 50-60Hz

Emergency

EMND: emergency non-dimmable
EMST: emergency self-test
EMDA: emergency DALI protocol

Finish

Standard product finish is white powder coated RAL 9010 with 30% gloss.

Note



Indicative lamp information shown. Consult lamp manufacturer for current information.

Cut-out

(overall width + 20mm) x
(overall length + 20mm)

Power Supply

- ND: non dimming
- 1-10V: 1-10 Volt dimming, min 10%
- DALI: DALI protocol, min 10%
- DSI: Digital

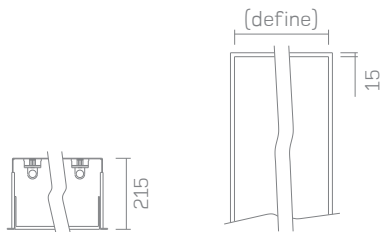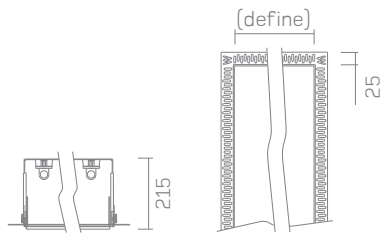

Specifier Details