




Ordering Information


Model	Fixation	Pattern	Length	Power ²	CRI/CCT ³	Driver ³	Lens	Finish	Cable
WG-20LDL	RBT RGT9 RGT15	S P ¹ PZ ¹	A A x B A x B x C A x B x A x B	L M	927 930 935 940	X SW D010 DALI LE	OD (std) SD	W (std) B G F	C4 (std) C10 C20 C30



Recessed Bezel Trim (RBT)



Solid Ceiling Mounting Options

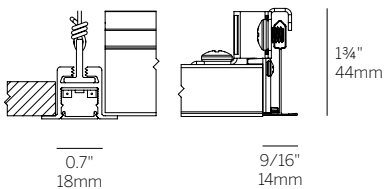

Grid On Bezel Front Section Elevation
Bezel Flush to Grid Ride Side Elevation

Luminaire

- Very shallow depth: 0.8" (20mm)
- Continuous snap-in Satin Opal Diffuser for even illumination without visible LED pattern.
- Continuous mounting to any desired length (within 0,25"/6.35mm) as well as standard grid multiples.
- Remote driver options. Field replaceable LED boards.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Lengths and angles factory-cut to exact field dimensions.
- Standard and custom corners.
- Configurations may include straight, angles and change in elevation such as wall-to-ceiling applications.

Fixation

- RBT = Recessed Bezel Trim
- RGT9 = Recessed Grid Trim 9/16" (14mm)
- RGT15 = Recessed Grid Trim 15/16" (24mm)

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (6.35mm), i.e. 72.25" (1835mm)
For patterns specify each length, i.e. 2 sided:
A x B = 72.25" (1835mm) x 48" (1220mm);
3 sided:
A x B x C; 4 sided: A x B x A x B)

Power²

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)

CRI/CCT³

- 90+ CRI (Low/Mid Power)
 - 927 = 2700K (617/1141 lm/m)
 - 930 = 3000K (636/1177 lm/m)
 - 935 = 3500K (649/1200 lm/m)
 - 940 = 4000K (656/1214 lm/m)

Driver (remote)³

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Cable

- C4 = 4' (1220mm) tray cable (plenum rated) (standard)
- C10 = 10' (3050mm) tray cable (plenum rated)
- C20 = 20' (7000mm) tray cable (plenum rated)
- C30 = 30' (9140mm) tray cable (plenum rated)

Emergency

- Emergency LED driver available, order separately.

¹ See pattern spec sheet.

² Wattage shown does not include power supplies/drivers.

³ Delivered lumens with satin opal diffuser shown.

⁴ Remote power supply required. See power supply page for details.

