





Ordering Information								
WG-P20LDL	Fixation	Pattern	Length	Power <sup>1</sup>	CRI/CCT <sup>2</sup>	Driver <sup>3</sup>	Lens	Finish
WG-20LDL-S	48 (std) 96	S	24 36 48 60 72 84 96 Specify ≤96"	L M	927 930 935 940	X SW D010 DALI LE	OD (std) SD	W (std) B G F

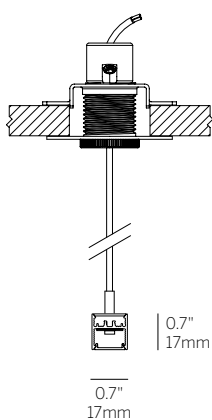

Gypsum Ceiling



Solid Ceiling

### Luminaire

- Evenly illuminated snap-in lens without visible LED pattern.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Powder coat painted white - RAL 9010.

### Fixation

- 48 = 48" (1220mm) suspension cable standard
- 96 = 96" s (2440mm) suspension cable, field-cuttable

### Pattern

- S = Straight run (individual fixtures only, for other configurations see WG-S20LDI)

### Length

- 24 = 24" (610mm)
- 36 = 36" (915mm)
- 48 = 48" (1220mm)
- 60 = 60" (1525mm)
- 84 = 84" (2130mm)
- 96 = 96" (2440mm)
- Specify ≤ 96" (2440mm)

### Power<sup>1</sup>

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)

### CRI/CCT<sup>2</sup>

90+ CRI (Low/Mid Power)

- 927 = 2700K (617/1141 lm/m)
- 930 = 3000K (636/1177 lm/m)
- 935 = 3500K (649/1200 lm/m)
- 940 = 4000K (656/1214 lm/m)

### Driver (remote)<sup>3</sup>

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

### Lens

- OD = Satin Opal Diffuser (standard)
- SD = Satin Clear Diffuser (high efficiency)

### Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

### Emergency

- Emergency LED driver available, order separately.

<sup>1</sup> Wattage shown does not include power supplies/drivers.

<sup>2</sup> Delivered lumens with satin opal diffuser shown for one direction.

<sup>3</sup> Remote power supply required. See power supply page for details.

