



20 Linear Surface Round Opal Diffuser

whitegoods

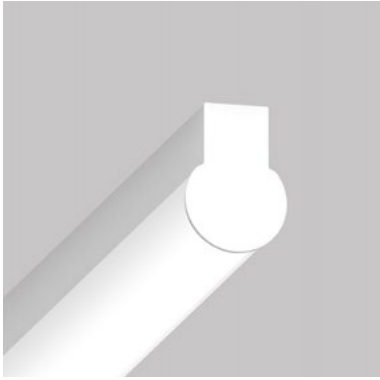

Ordering Information									
Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	Lens	Finish	Cable
WG-20LDL-SM		S					ROD		
WG-20LDL-SM	GT9 GT15 MM SC A90 A180	S	24 36 48 60 72 84 96 Specify ≤ 96	L M	927 930 935 940	X SW D010 DALI LE	ROD	W (std) B G F	C4 (std) C10 C20 C30

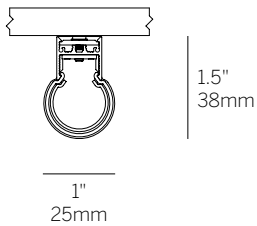

Luminaire

- Tubular design gives light in all directions, including behind the luminaire, 315° distribution.
- Delivers a soft, even spread of light.
- End-to-end mounting gives uninterrupted lighting effect.
- Available in 0.25" (6.35mm) increments.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Supplied with 4' (1220mm) class 2 plenum rated feed cable per fixture lengths.

Fixation

- GT9 = 9/16" T-bar grid clip
- GT15 = 15/16" T-bar grid clip
- MM = Magnet mounting
- SC = Screw clip
- A90 = Adjustable 90° bracket
- A180 = Adjustable 180° bracket

Pattern

- S = Straight run (individual fixtures only, runs are made up from standalone units ≤ 96" (2400mm))

Length

- 24 = 24" (610mm)
- 36 = 36" (915mm)
- 48 = 48" (1220mm)
- 60 = 60" (1525mm)
- 72 = 72" (1830mm)
- 84 = 84" (2130mm)
- 96 = 96" (2440mm)
- Specify ≤ 96" (2440mm)

Power¹

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)

CRI/CCT²

- 90+ CRI (low/mid/high power)
 - 927 = 2700K, (738/1361 lm/m)
 - 930 = 3000K, (761/1407 lm/m)
 - 935 = 3500K, (777/1433 lm/m)
 - 940 = 4000K, (784/1500 lm/m)

Driver (remote)³

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

Lens

- ROD = Round opal diffuser

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Cable

- C4 = 4' (1220mm) tray cable (plenum rated) (standard)
- C10 = 10' (3050mm) tray cable (plenum rated)
- C20 = 20' (7000mm) tray cable (plenum rated)
- C30 = 30' (9140mm) tray cable (plenum rated)

Emergency

- Emergency LED driver available, order separately.

¹ Wattage shown does not include power supplies/drivers.

² Delivered lumens with round opal diffuser shown.

³ Remote power supply required. See power supply page for details.

