

Gypsum Ceiling Mounting
4" (100mm) minimum offset,
12" (305mm) typical offset
Can be installed in Cove or Coffered

Ordering Information

Model	Fixation	Pattern	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-MEC	RPT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M H	927 930 935 940	X SW D010 DALI LE	SSD (std) CDC SDC	W (std) B G F	LEC REC LREC

Luminaire

- Light source positioned for optimum horizontal spread of illumination.
- Light source is not visible from any viewing angle up to and including direct horizontal view.
- Delivers continuous soft wash of directed light to above surface.
- Satin Diffuser for high efficiency and soft edge beam without striations.
- Removable light source sub assembly for simple installation and maintenance.
- High efficiency linear LED in a range of outputs.
- Integral drivers and through wiring.
- Lengths and angles factory cut to exact field dimensions.
- Mitered corners available with continuous illumination.

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (6.35mm), i.e. 72.25" (1835mm)
For patterns specify each length, i.e. 2 sided:
A x B = 72.25" (1835mm) x 48" (1220mm);
3 sided:
A x B x C; 4 sided: A x B x A x B)

LED³

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)
- H = 34W/m high power (24V)

CRI/CCT⁴

- 90+ CRI minimum (Low/Mid/High)
- 927 = 2700K, (797/1476/2200 lm/m)
 - 930 = 3000K, (823/1522/2270 lm/m)
 - 935 = 3500K, (840/1555/2316 lm/m)
 - 940 = 4000K, (850/1568/2339 lm/m)

Driver (remote)³

- X = Driver ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

Lens

- SSD = Snap On Satin Diffuser (standard)
- CDC = Clear Dust Cover
- SDC = Satin Clear Dust Cover

Finish

- W = White powder coated, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps

Emergency

- Emergency LED driver available, order separately.

¹ Wattage shown does not include power supplies/drivers.

² Delivered lumens with Snap On Satin diffuser shown.

³ Remote power supply required. See power supply page for details.




Mini Edgeless Cove



End Cap Details

whitegoods

End Caps




WG-MEC-LEC
Left End Cap*


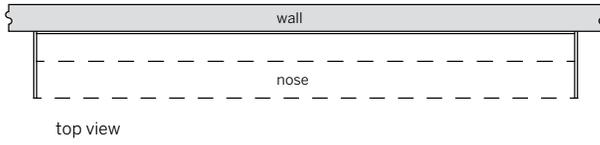


WG-MEC-REC:
Right End Cap*

End Returns



WG-MEC-LWR:
Left End Wall Return*

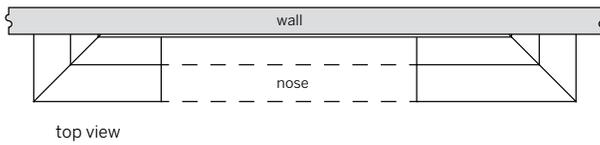

WG-MEC-RWR:
Right End Wall Return*