


Bezel Trim (RBT)

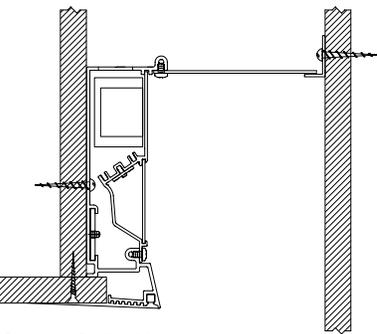

Gypsum Ceiling Mounting
4" (100mm) minimum offset,
6" (150mm) typical offset.
Plaster Trim mounting option shown.

Ordering Information

Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	In-fill	Lens	Finish	Options
WG-VPC	RBT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M H	927 930 935 940	X SW D010 DALI LE	X P4 P6 P8	SD (std)	W (std) B G F	LEC REC LREC

Luminaire

- Light source positioned for optimum vertical spread of illumination.
- Light source is not visible from any viewing angle up to and including direct vertical view.
- Delivers continuous soft wash of directed light to adjacent surface.
- Satin Diffuser for high efficiency and soft edge beam without striations.
- Removable light source sub assembly for simple installation and maintenance.
- High efficiency linear LED in a range of outputs.
- Lengths and angles factory cut to exact field dimensions.
- Mitered corners available with continuous illumination.

Fixation

- RBT = Recessed bezel trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (6.35mm), i.e. 72.25" (1835mm)
For patterns specify each length, i.e. 2 sided:
A x B = 72.25" (1835mm) x 48" (1220mm);
3 sided:
A x B x C; 4 sided: A x B x A x B)

Power³

- L = 10.5W/m low power (24V)
- M = 21W/m mid power (24V)
- H = 34W/m high power (24V)

CRI / CCT⁴

- 90+ CRI minimum (Low/Mid/High)
- 927 = 2700K, (735/1355/2020 lm/m)
- 930 = 3000K, (758/1397/2086 lm/m)
- 935 = 3500K, (771/1427/2129 lm/m)
- 940 = 4000K, (781/1440/2148 lm/m)

Driver (integral)⁵

- X = No driver, ordered separately
- SW = Switched/NON DIM
- D010 = 0-10/1-10V DIM
- DALI = DALI DIM
- LE = Leading-Edge DIM

In-fill

- X = No in-fill panel
- P4 = 4" (100mm) in-fill panel
- P6 = 6" (150mm) in-fill pane
- P8 = 8" (200mm) in-fill panel

Lens

- SD = Satin clear diffuser (standard)

Finish

- W = White finished trim, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps


- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options
- 2 See pattern spec sheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with satin clear diffuser shown.
- 5 See power supply spec sheet.




Vertical Cove

Ends and Corners


End Caps



WG-VBC-LEC
Left End Cap*



top view



WG-VBC-REC
Right End Cap*