



# 20 Linear Direct / Indirect

## Suspended

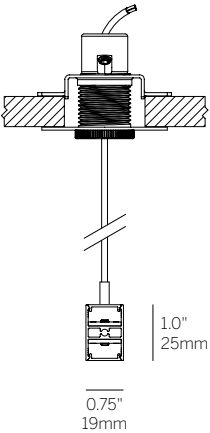

Gypsum Ceiling



Solid Ceiling

### \*Direct/Indirect Specify one from each

- ex 1: - L1 - D010 - SD
- ex 2: - M3 - S - SD

Power/CRI/CCT		Driver <sup>4</sup>		Lens
	L	M	X	OD
927	L1	M1	S	SD
930	L2	M2	D010	
935	L3	M3	L3DAE	
940	L4	M4	L3DOE	
			DFPN	

### Ordering Information

Model	Fixation	Pattern	Length	Direct*	Indirect*	Finish	Options
WG-20LDI-S							
WG-20LDI-S	48 96	S P <sup>1</sup>	A	<b>Specify options using chart below*</b>  See ex 1: L1 - D010 - SD	<b>Specify options using chart below*</b>  See ex 2: M3 - S - OD	W (std) B G F	DC

### Luminaire

- Evenly illuminated snap-in lens without visible LED pattern.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Powder coat painted white - RAL 9010.

### Fixation

- 48 = 48" suspension cable standard
- 96 = 96" suspension cable, field-cutttable

### Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane<sup>1</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>2</sup>

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft mid power (24V)

### CRI/CCT<sup>3</sup>

- 90+ CRI minimum (Low/Mid)
- 927 = 2700K (188/348 lm/ft)
- 930 = 3000K (194/359 lm/ft)
- 935 = 3500K (198/366 lm/ft)
- 940 = 4000K (200/370 lm/ft)

### Driver (integral)<sup>4</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1 EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

### Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

### Finish

- W = White powder coated RAL 9010, 20% gloss (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

### Options

- DC = dual circuit

### Emergency

- Emergency LED driver available, order separately.

<sup>1</sup> See pattern specsheet.

<sup>2</sup> Wattage shown does not include power supplies/drivers.

<sup>3</sup> Delivered lumens with satin opal diffuser shown for one direction.

<sup>4</sup> Remote power supply required. See power supply page for details.