

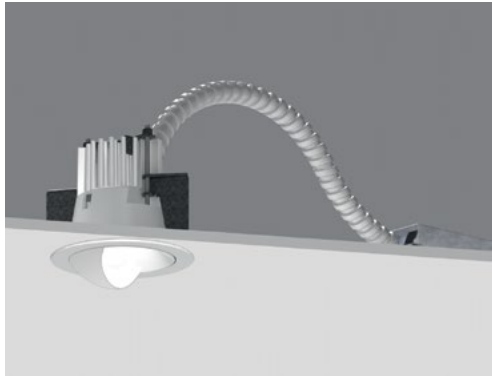


2.4" General Downlight Wall Wash


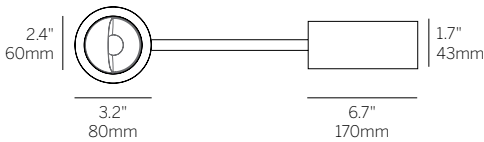


Ordering Information

Model	Fixation	Power ¹	CRI/ CCT ^{2,3}	Driver ⁴	Lens	Finish	Options
WG-60RGDL	RBT	L M H	827 830 835 840	X S S010 SPH D010 PEQ1 PEQ0 DFPN	RWW	W (std) B G P F	CP IC LP SH WL

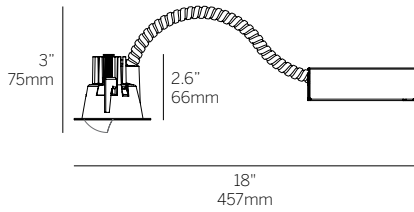

Standard housing

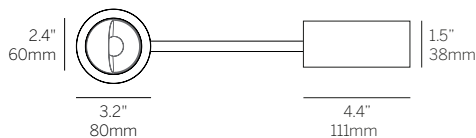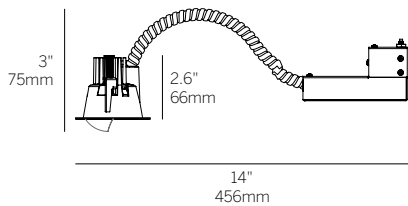

Shallow housing (SH)

Luminaire

- 2.4" (60mm) small aperture, low brightness downlight for general illumination.
- Suitable for interior use only.
- Installation from below the ceiling for remodel and new construction.
- Integral or remote driver. Integral driver requires 4.5" (114mm) minimum ceiling clearance (void).
- White finish standard.

Fixation

- RBT = Recessed bezel trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

CRI/CCT^{2,3}

- 80+ CRI (Low/Medium/High Power)
- 827 = 2700K, (838/1233/1540 lm)
- 830 = 3000K, (901/1233/1540 lm)
- 835 = 3500K, (965/1311/1698 lm)
- 840 = 4000K, (965/1311/1698 lm)
- For 90+ CRI, specify 927, 930, etc. Approximately 15% less lumens.

Driver⁴

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- RWW = Round Wall Wash

Finish (Trim/Cone)

- W = white (standard)
- B = Black
- G = Gray
- P = Polished
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Housing
- IC = IC/NC Housing
- LP = Landing Pan
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location
- To specify multiple options, select the appropriate grouped codes from drop-down e.g. SH-WL

Emergency

- Emergency LED driver available, order separately (remote)

¹ Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.

² Other lumen packages available, consult factory.


³ Source lumens shown, see IES files for delivered lumens.

⁴ See power supply page for details.




2.4" General Downlight


Wall Wash - Dimensions

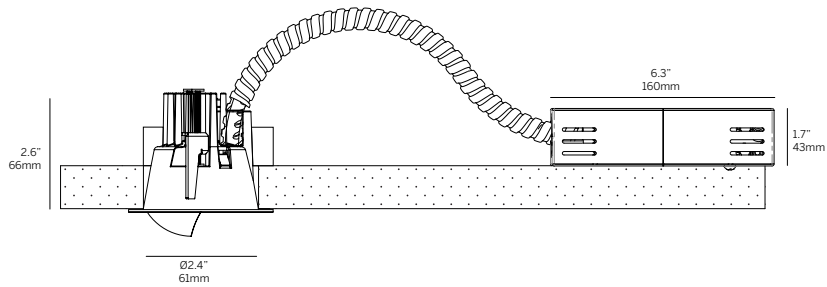

Integral Driver (standard)^{1,3}

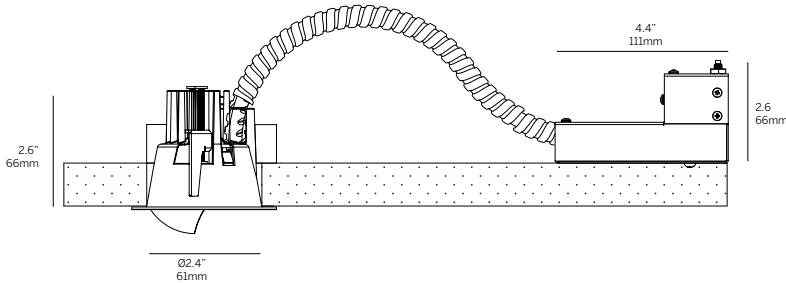

Integral Driver (shallow - SH)^{2,3}

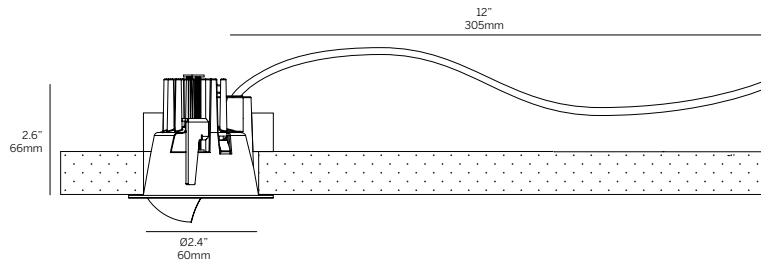


Remote Driver^{2,3}


- 1 Requires 4.5" minimum ceiling clearance (void)
- 2 Requires 3.5" minimum ceiling clearance (void)
- 3 1" max ceiling thickness, 1/16" min ceiling thickness, Does not allow through-wiring

Drivers


S (Standard non-dim)
SPH (Standard Phase Dimming wired for forward phase)



S010 (Standard 0-10V)
D010 (EldoLED 0-10V)




DFPN (Lutron forward phase with neutral)
SPH (Standard Phase Dimming wired for reverse phase)

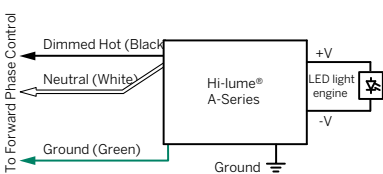

Note: Colors shown correspond to terminal blocks on driver.

PEQ1 1%/PEQ0 0.1% Dimming
(Lutron EcoSystem 1% or 0.1% digital)

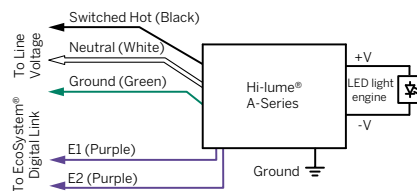

Note: Colors shown correspond to terminal blocks on driver.