


20 Mini Edgeless Cove - Indirect/Uplighting

WG 20MEC-RPT

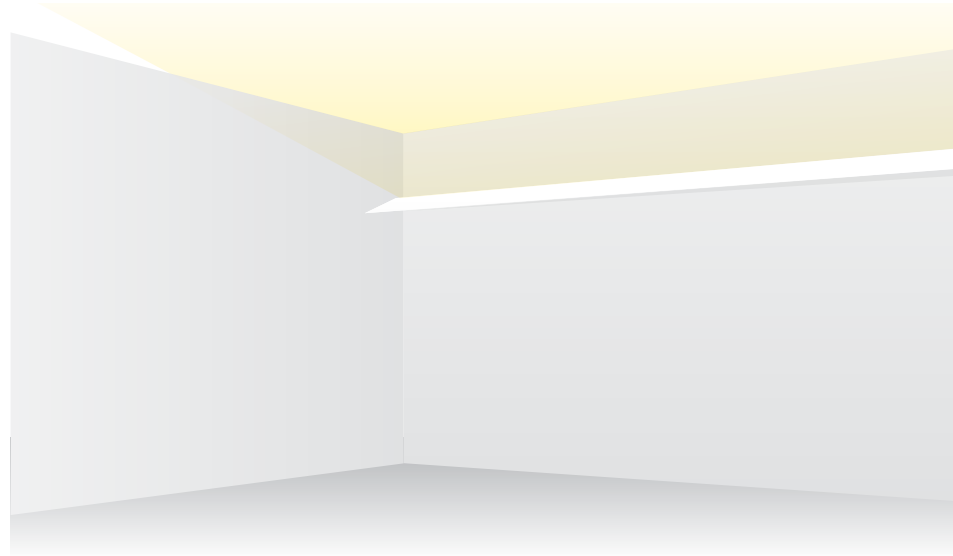


A versatile luminaire suited to uplighting applications, producing plenty of even ambient light and lifting the ceiling for a fresh feel to the space.

The leading edge rakes back to minimise the impression of the luminaire on the wall.


The aluminium profile forms a perfectly crisp contrasting edge against the lit surface above.

Mounting and Recommended Spacing

Wall Mounting

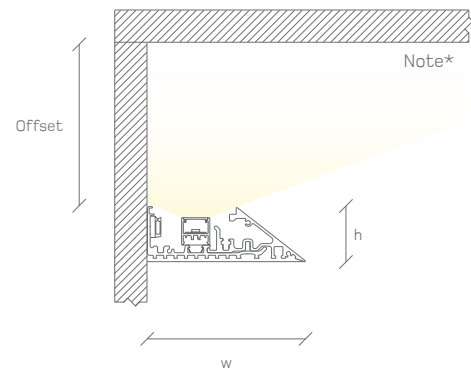

Ceiling Level Change (Coffer or Raft)

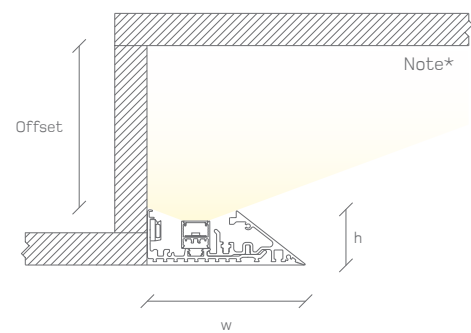

Note*

Paint out all internal surfaces of cove in matt white.


Offset

Typical Offset 300mm
Optimum Offset 610mm
Minimum Offset 100mm

Dimensions

w = 3.7" (94mm)
h = 1.3" (33mm)


2700mm Ceiling, 610mm Optimum Offset

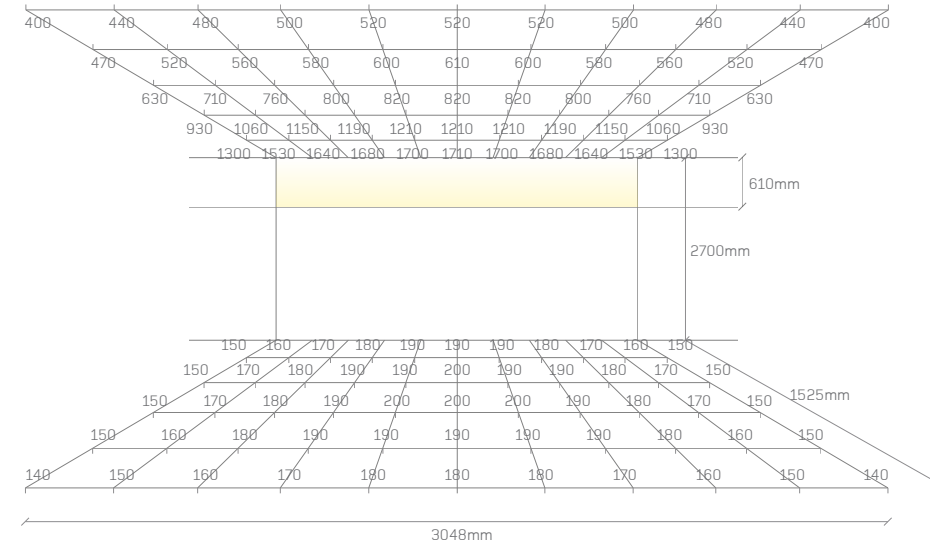

The diagrams show the expected light level on the floor and ceiling adjacent to a cove mounting position at the distance from the ceiling indicated.

This page shows what we feel are the optimum offsets for the ceiling heights as shown. The following page shows results at different offsets.

3650mm Ceiling, 610mm Optimum Offset

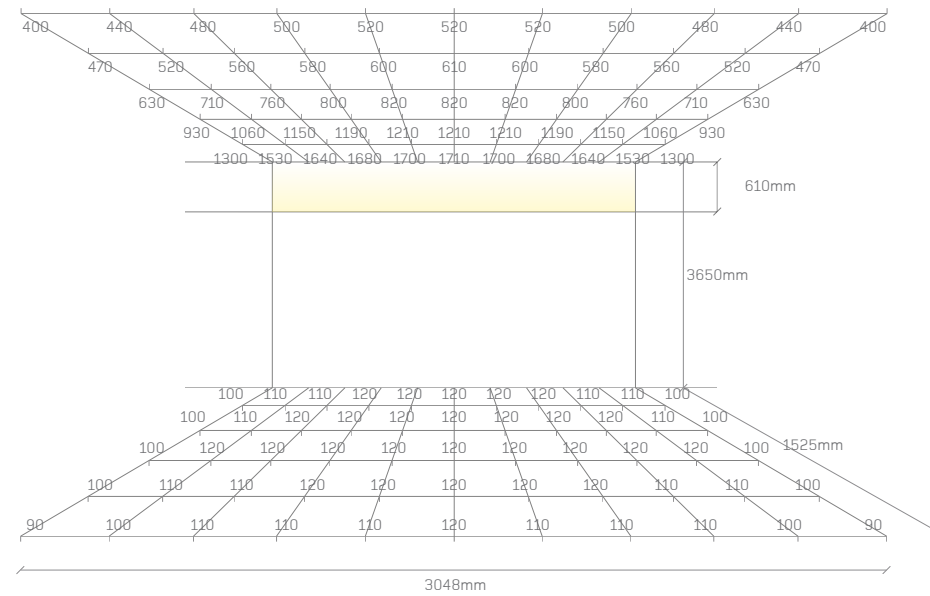

Values in Lux

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1900lm/m*	Satin Clear
Walls 50%		3000 Kelvin	
Floor 20%		90 CRI	

20 Mini Edgeless Cove
Plaster Trim


Product Details

214


20 Mini Edgeless Cove - Indirect/Uplighting

WG 20MEC-RPT


2700mm Ceiling, 300mm Offset

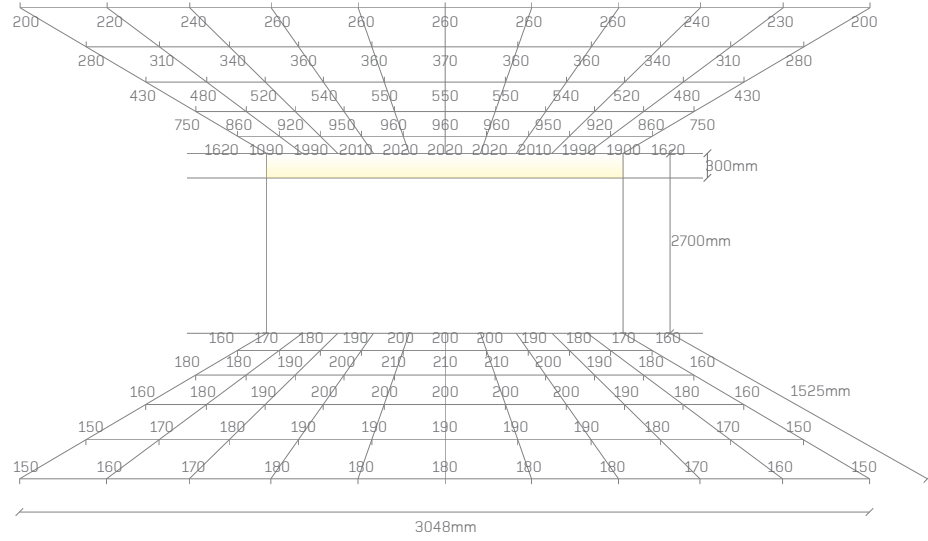


2700mm Ceiling, 460mm Offset

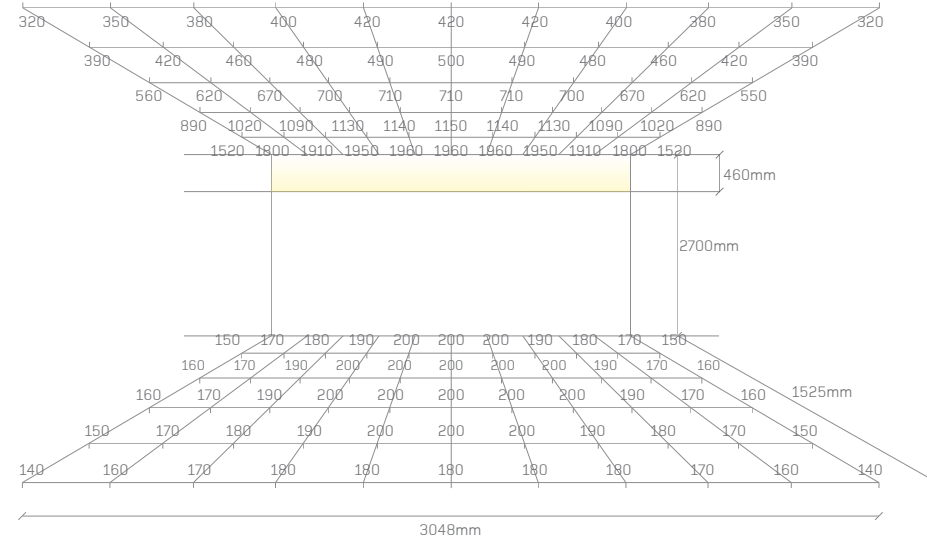

3650mm Ceiling, 300mm Offset

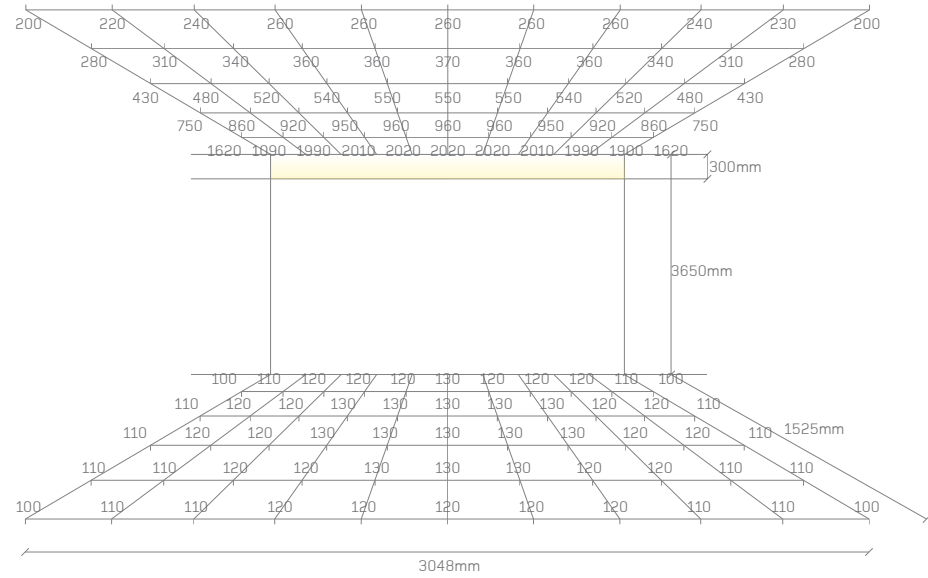

3650mm Ceiling, 460mm Offset

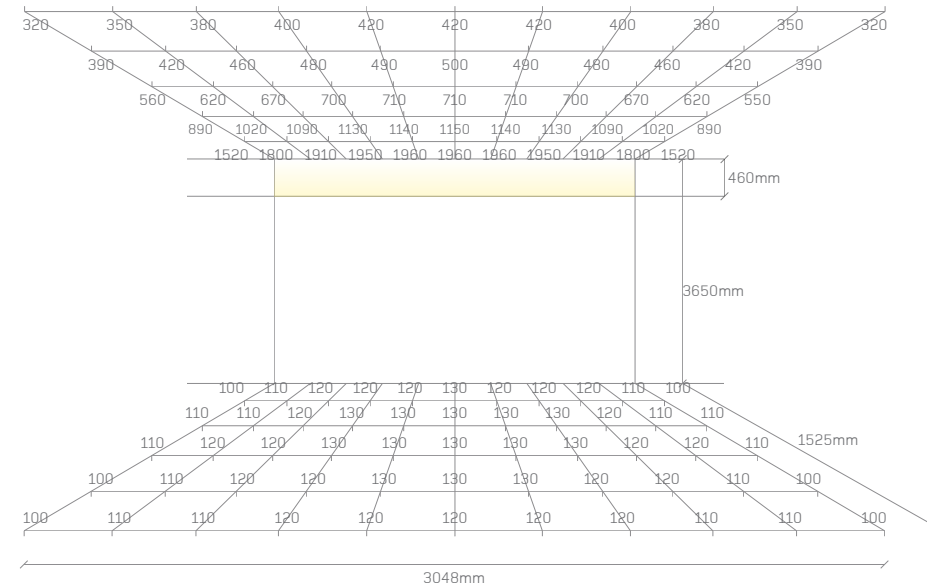

Values in Lux

Values in Lux

Calculated on the following basis:

20 Mini Edgeless Cove
Plaster Trim

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1900lm/m*	Satin Clear
Walls 50%		3000 Kelvin	
Floor 20%		90 CRI	

Product Details 214

*Lumen data correct at the time of print. Source lumens shown. For up to date lumen data refer to specsheet.