


# 300 Square Gimbal


whitegoods

Project Title: .....


Luminaire Ref: .....

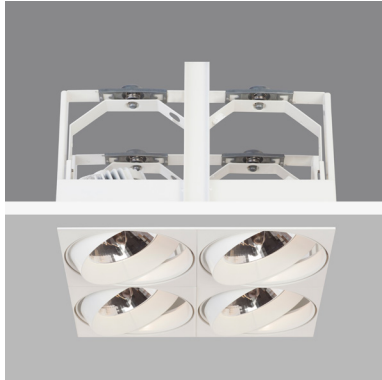

plaster-in

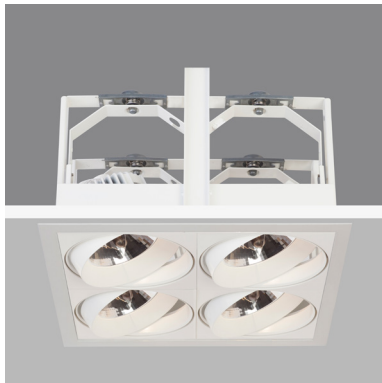

bezel

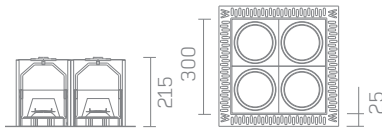

## Ordering Information

Code	Module	Diffuser	Driver	Voltage	Emergency
<b>P300SRG</b> plaster-in <b>B300SRG</b> bezel	<b>LVAR111/LEDR111*</b> low voltage metal reflector/ LED metal reflector <b>CDM-TC*</b> ceramic discharge metal halide <b>CDMR111*</b> ceramic discharge metal reflector	<b>OA*</b> open aperture (see accessories for available options.)	<b>ND</b> non-dim <b>1-10V</b> 1-10 Volt dim <b>TR</b> trailing edge dim <b>DALI</b> DALI protocol <b>DSI</b> Digital	<b>220-240V</b> standard <b>120-277V</b> universal	<b>EMND</b> non-dim

\* Items available for Quickship

## Product Description

A 150mm linear recessed directional multiple head gimbal luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact.

### Lamp

**LVAR111:** low voltage reflector  
Type: AR111  
Base: G53  
Lamp power: 35-100W  
Lamp lumens: 8500 lm

**LEDR111:** low voltage reflector  
Type: LEDR111  
Base: G53  
Lamp power: -  
Lamp lumens: -

**CDM-TC:** ceramic discharge metal halide  
Type: CDM-TC  
Base: G8.5  
Lamp power: 35-70W  
Lamp lumens: 2200-6000 lm

**CDMR111:** ceramic discharge metal reflector  
Type: CDMR111  
Base: GX8.5  
Lamp power: 35-70W  
Lamp lumens: 4225 lm

### Cut-out

170 x (length +20 mm)

## Accessories

AC-110-F: frosted glass  
AG-110-C: clear glass  
AG-110-S: sculpture glass  
AG-110-C: micro prismatic glass  
AL-110: louvre  
AS-110: snoot

## Power Supply

- ND: non-dimming
- 1-10V: 1-10 Volt dimming, min 10% (low voltage only)
- TR: trailing edge dimming (excludes ceramic metal halide)
- DALI: DALI protocol, min 10% (low voltage only)
- DSI: Digital (low voltage only)

## Voltage

220-240V AC 50-60Hz  
120-277V universal AC 50-60Hz

## Emergency

EMND: emergency non-dimmable (available for LVC and CFL only)

## Note

- Indicative lamp information shown. Consult lamp manufacturer for current information.
  - 30° tilt in all directions.
- Please contact Whitegoods for further lamp specifications.

## Specifier Details